

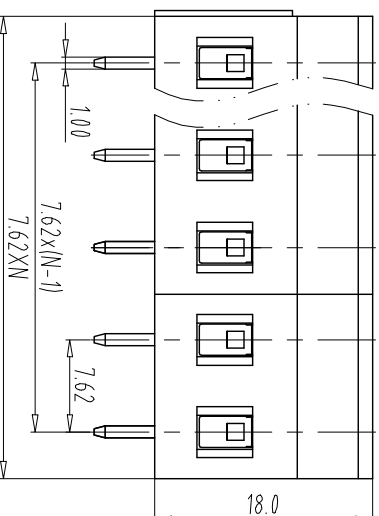
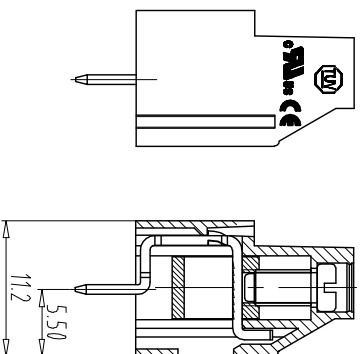


		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

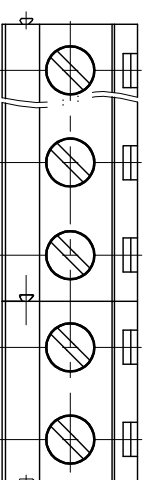

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	6.0kV
Rate Voltage(V)	450V
Rate Current(A)	20A

- NOTES:
- UL Standard
- 1.
- | Use group | B | C | D |
|---------------|------|---|------|
| Rated Current | 20A | — | 10A |
| Rated Voltage | 500V | — | 500V |
2. Wire range: 26~12AWG
3. Torque value: M3, 4, 4.3lb.in
- IEC Standard

2. Wire range: 0.5~2.5mm²
3. Torque value: M3, 0.5Nm
- NOTES:

- NOTES:
- 1.Pitch: 7.62mm Poles: 02-24P
 - 2.Stripping length: 8mm
 - 3.Operating temperature: -40°C ~ +105°C
 - 4.RoHS Compliance

How to order

UL0-TB43 - 129/7.62 - XXP - 4 000A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

1: Grey
2: Blue
3: Black
4: Green
5: Orange
6: Red
7: transparent
8: Yellow
9: White

Total Pitch Tolerances	Nominal dimension range	+	-	//

		m (mm)										m (mm)											
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over			
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	100	over			
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all			
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	100	150				
+0.18 ± 0.20		+0.25 ± 0.3		+0.35 ± 0.44		+0.55 ± 0.70		+0.75 ± 0.20		+0.25 ± 0.30		+0.35 ± 0.44		+0.55 ± 0.70		+0.80 ± 0.90		0.2		0.3			
0.5		0.2		0.3		0.5		0.2		0.3		0.5		0.2		0.3		0.5		0.2			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE 2022.03.15	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	A4
APP.	DATE				
NINGBO ULIO ELECTRONICS CO.,LTD.			ULIO-TB43-1297-62-XXP-Y000A		
宁波欧路电子有限公司			ULIO-TB43-1000A		