

		2		1	
REV	ECN NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 26 ~ 12AWG

3.Torque value: M2.5, 3.54Lb.in

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	20A

2. Wire range: 0.5-2.5mm²

3. Torque value: M2.5, 0.4Nm

NOTES:

- 1.Housing(2P): PA66(UL94 V-0)
- 2.Housing(3P): PA66(UL94 V-0)
- 3.Solder Pin: Brass(Tin Plated)
- 4.Block: Brass(Ni Plated)
- 5.Screw: Steel(M2.5,Zn Plated)

NOTES:

- 1.Pitch: 5.0mm Poles: 02-24P
- 2.Stripping Length: 8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

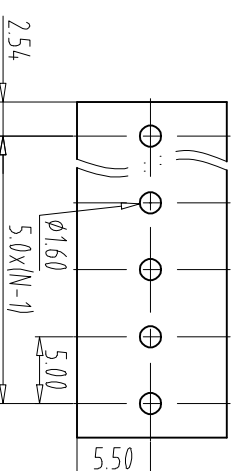
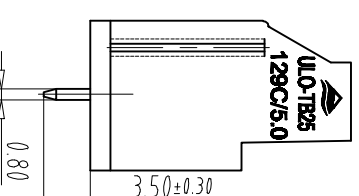
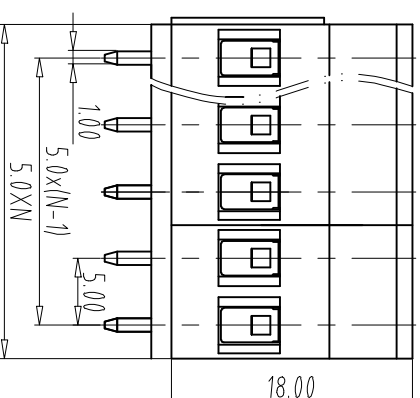
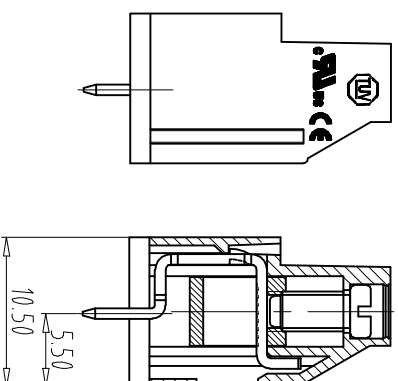
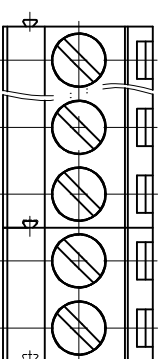
UL0-TB25 - 129C/5.0 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles

Customer requirements

—color:

- 1: Grey 6: Red
2: Blue 7: transparent
3: Black 8: Yellow
4: Green 9: White
5: Orange

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZw	DATE 21.05.08	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4
APP.		DATE			
NINGBO UL0 ELECTRONICS CO.,LTD			NAME		
宁波欧路电子有限公司			UL0-B25-129V/5.0-XXP-Y000A		
			DWGNO. UL0TB25Y000A		