

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

- | Use group | B | C | D |
|---------------|------|---|------|
| Rated Current | 15A | — | 10A |
| Rated Voltage | 300V | — | 300V |

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)

NOTES:

- 1.Pitch: 3.5mm Poles:02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

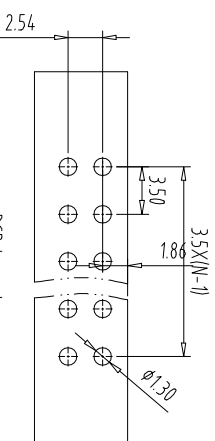
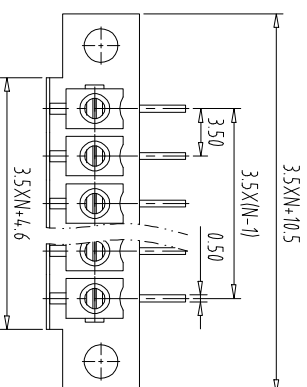

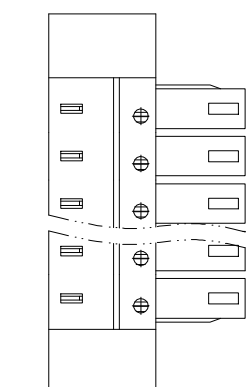

How to order

U10-TB01 - 15AM/3.5 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles	Customer requirements
---------------------------	-----------------	-------	--------------------------

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	LZW	DATE 2021.03.26	UNITS	MM	1/1
CHK.		DATE	SCALE	A4	
APP.		DATE			



NINGBO ULO ELECTRONICS CO., LTD
宁波欧路电子有限公司

DWGNO.	UL0TB01Y000A
--------	--------------