

FILE: 2021-D01VUL0											
REV		EC.N NO.		CONTENT		CHK		DATE			

NOTES1:
UL Standard

1		Use group	B	C	D
		Rated Current	10A	—	10A
		Rated Voltage	300V	—	300V
2		Wire range:	12~26AWG		

IEC Standard

1		Pollution Degree	2
		Overvoltage Category	II
		Rate Impulse Voltage(KV)	4KV
		Rate Voltage(V)	320V
		Rate Current(A)	20A

2.Wire range: 0.2-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Spring: Stainless steel
- 3.Clamp: Copper Alloy(Sn Plated)
- 4.Button: PA66(UL94V-0)
- 5.Cover: PA66(UL94V-0)
- 6.Screw: Steel(Zn Plated)

NOTES3:



- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Stripping length: 9mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB26 - 2KDAM/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

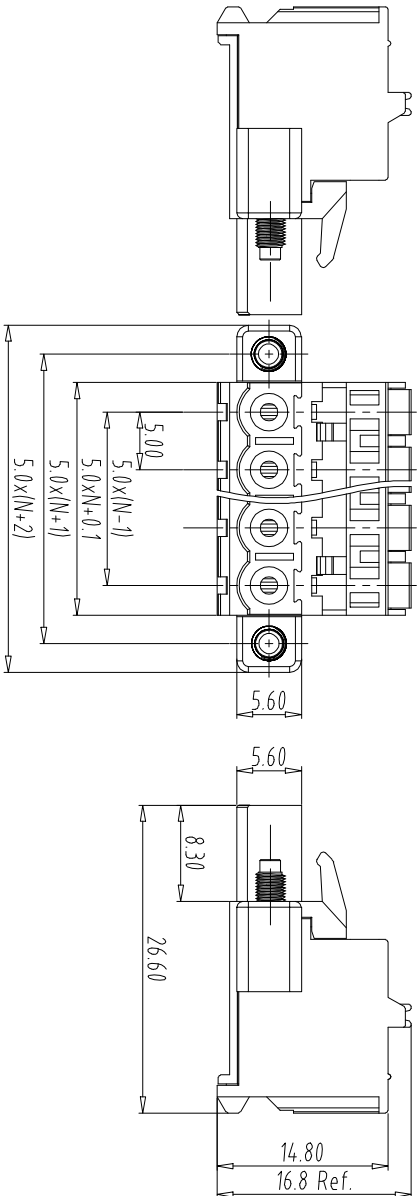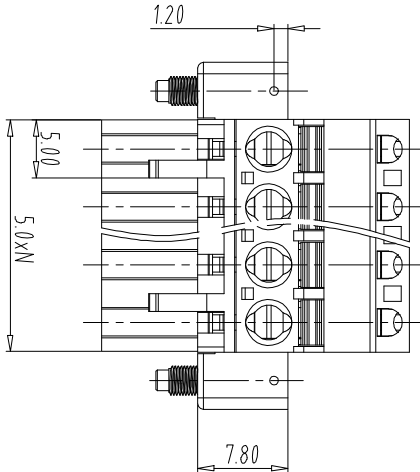

A		Total Pitch Tolerances		Nominal dimension range		T		=		—		//	
		in mm		in mm									
over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90
to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44
6				5				4		3		2	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.28	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB26-2KDAM/5.0-XXP-Y000A		
			DWGNO.	UL0TB26Y000A	

