
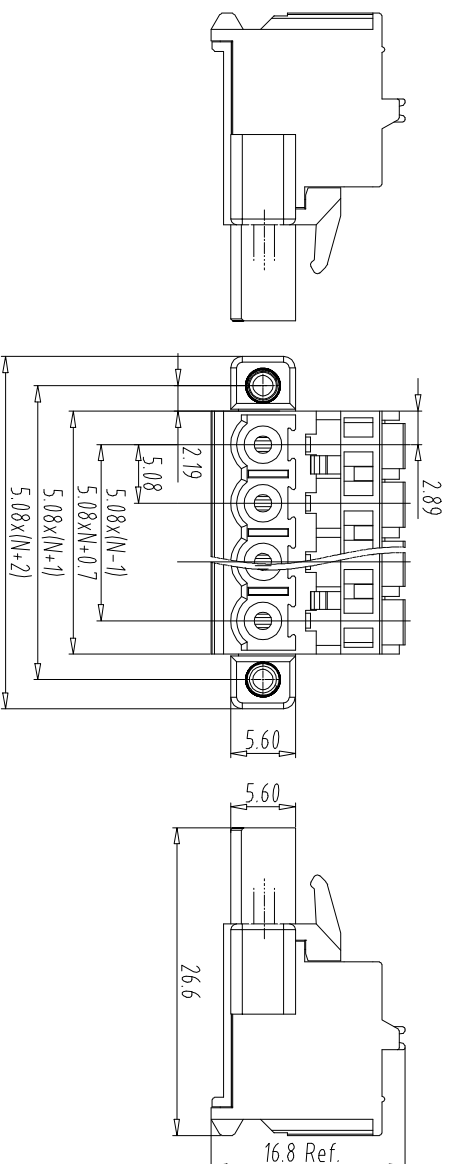


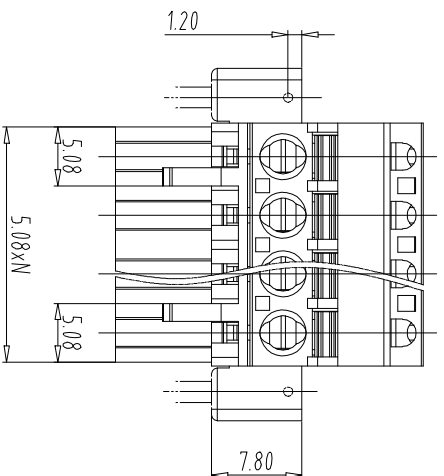

NOTES:

UL Standard

ج

Use group	B	C	D
Rated Current	10A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 12~26AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4kV
Rate Voltage(V)	320V
Rate Current(A)	20A

2.wire range: 0.2-2.5mm²

NOTES2

1.Housing: PA66(UL94V-0)

2.Spring: Stainless steel

3. Clamp: Copper Alloy (Sn Plated)

4.Button: PA66(UL94V-0)

5.Cover: PA66(UL94V-0)

6.Screw: Steel(Zn Plated)

NOTES:

1.Pitch: 5.08mm Poles: 02-24P

2.Stripping length: 9mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

UL0-TB32 - 2KDAM/5.08 - XXP - Y 0 0 0 A

Certificate Series NO.	Factory Code	poles

Customer requirements

— color

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White

ITEM	NAME OF PART		NO. OF PART	Q-TY	MATERIAL		NOTE
DWG.	LZ W	DATE	21.04.28	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1 : 1	A4	
APP.		DATE		NAME			
				UL0-1B32-2KDAM/5-08-XP-Y000A			
				DWGNO. UL01B32Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司							