


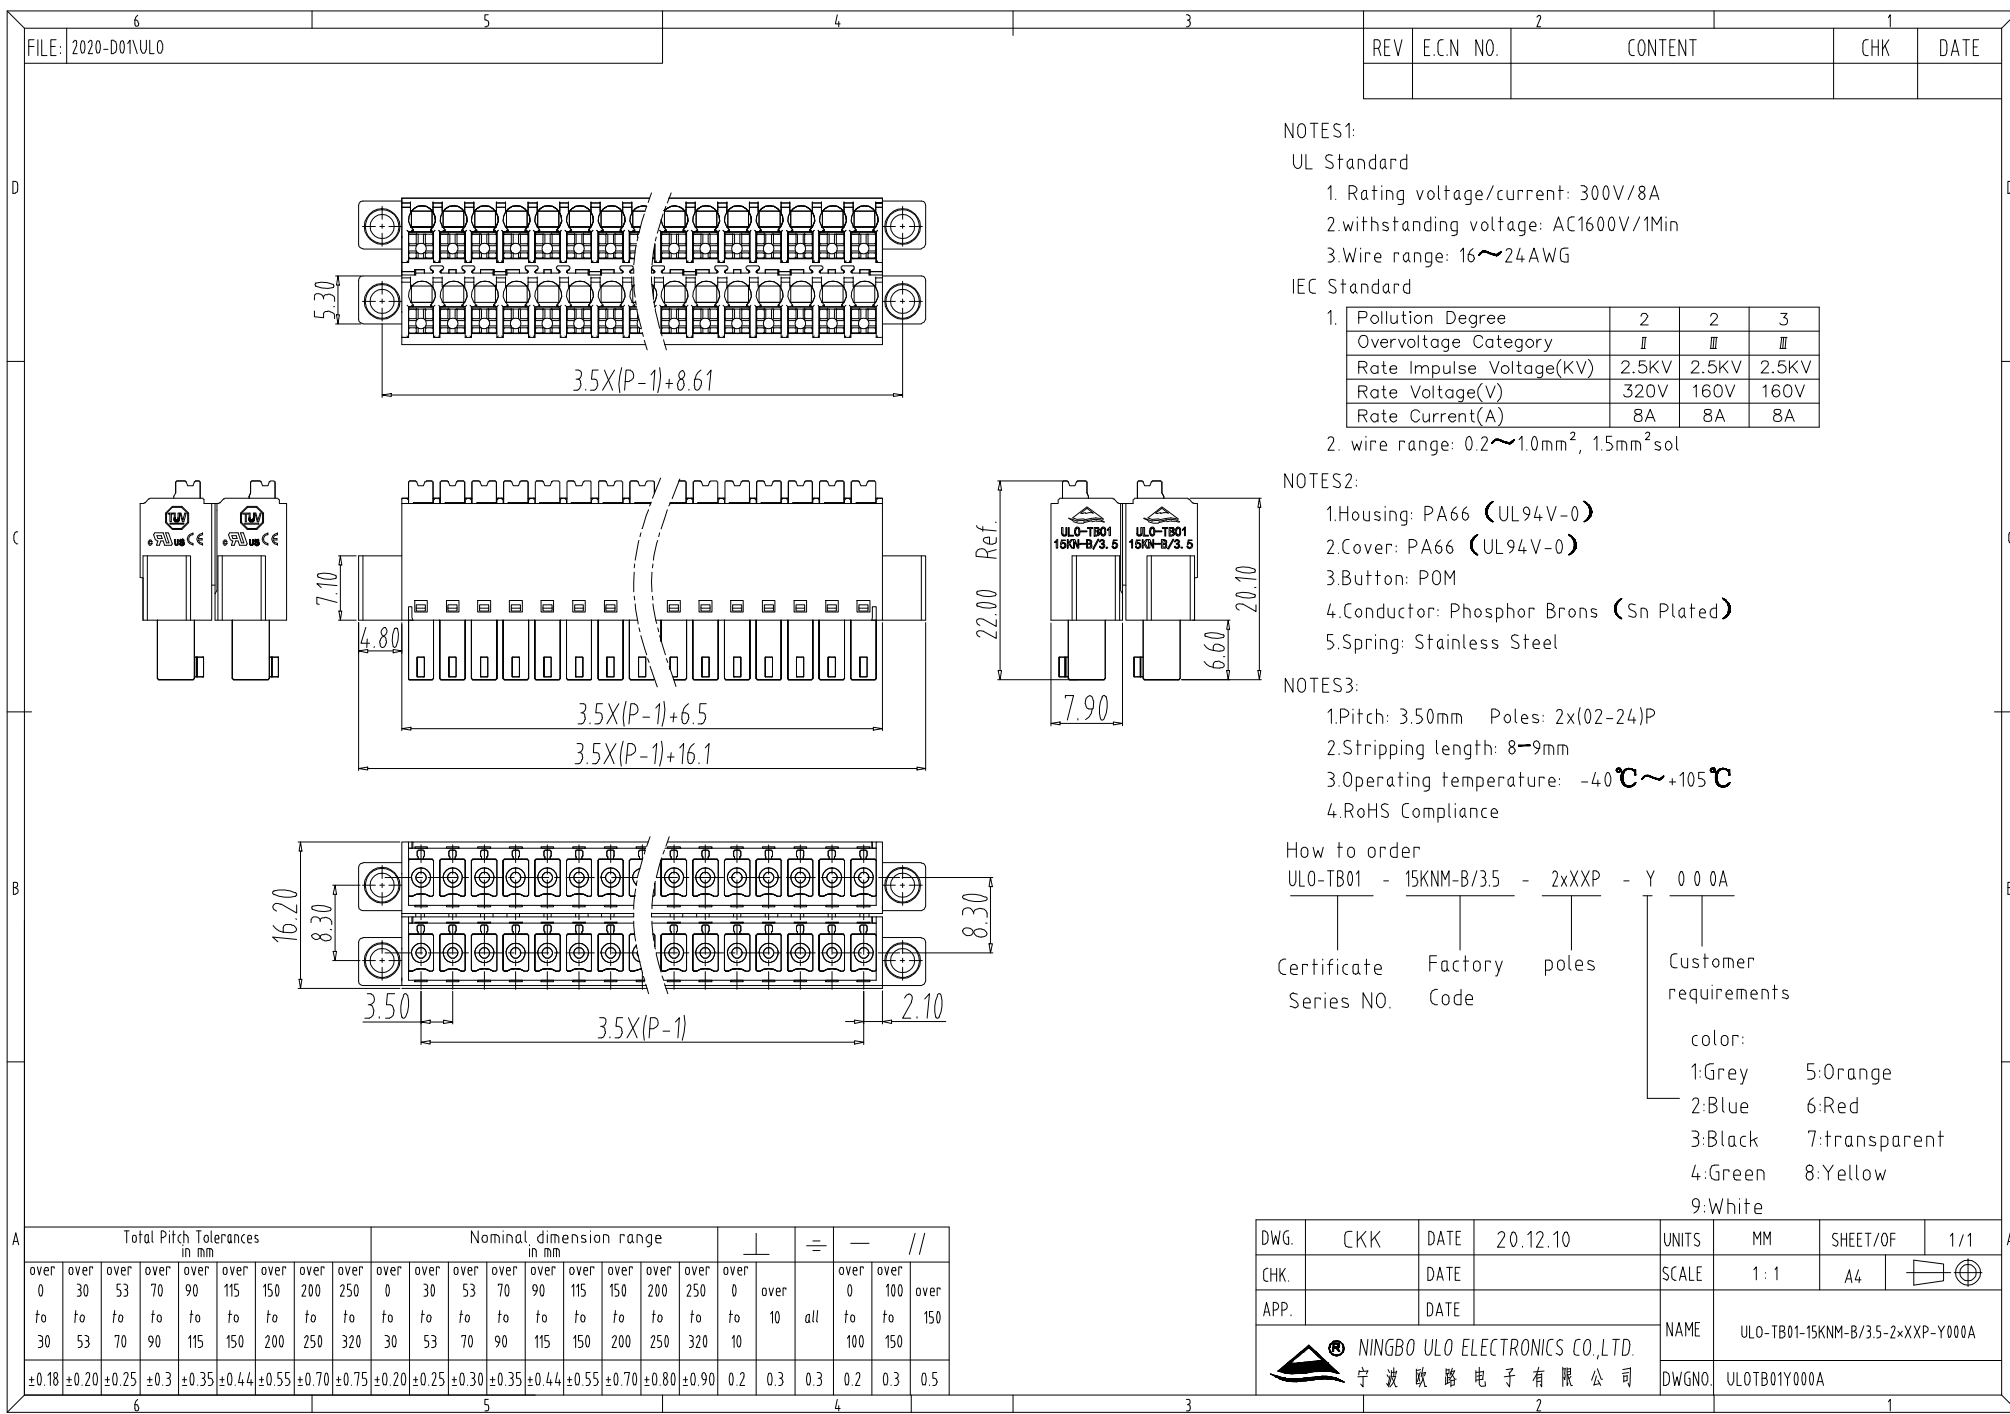

FILE: 2020-D01VUL0

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Rating voltage/current: 300V/8A
2. withstanding voltage: AC1600V/1Min
3. Wire range: 16~24AWG

IEC Standard

1. Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	320V	160V	160V
Rate Current(A)	8A	8A	8A

2. wire range: 0.2~1.0mm², 1.5mm²sol

NOTES2:

1. Housing: PA66 (UL94V-0)
2. Cover: PA66 (UL94V-0)
3. Button: POM
4. Conductor: Phosphor Brons (Sn Plated)
5. Spring: Stainless Steel

NOTES3:

1. Pitch: 3.50mm Poles: 2x(02-24)P
2. Stripping length: 8~9mm
3. Operating temperature: -40℃~+105℃
4. RoHS Compliance

How to order

ULO-TB01 - 15KNM-B/3.5 - 2xXXP - Y 0 0 0A

Certificate Factory poles Customer
Series NO. Code requirements

color:
1:Grey 5:Orange
2:Blue 6:Red
3:Black 7:transparent
4:Green 8:Yellow
9:White

A	Total Pitch Tolerances									Nominal dimension range									$\perp$		$\equiv$	$—$		$//$				
	in mm									in mm																		
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	10		0	100	100	100	150	150
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	to	to	to
	30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10				100	100	150	150		
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5				

DWG.	CHK	DATE	20.12.10	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE		NAME	ULO-TB01-15KNM-B/3.5-2xXXP-Y000A		
NINGBO ULO ELECTRONICS CO.,LTD.				DWGNO.	ULOTB01Y000A		