

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1. Rating voltage/current: 300V/10A

2. Wire range: 18~24AWG

IEC Standard

→

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	1.25KV
Rate Voltage(V)	130V
Rate Current(A)	10A

2.wire range: 0.5-1.0mm²

3. Torque value: M_2 , 0.2Nm

NOTES:

1.Housing(2P): PA66(UL94V-0)

2. Cage: Brass (Sn Plated)

3.Spring: Stainless Steel

4.Screw:Steel(Zn Plated/M2.0)

5.Housing(3P): PA66(UL94V-0)

NOTES:

1.Pitch: 3.96mm Poles: 02-24P

2. Stripping length: 10mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

UL0-TB17 - 350/3.96 - XXP - Y 0 0 0A


Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

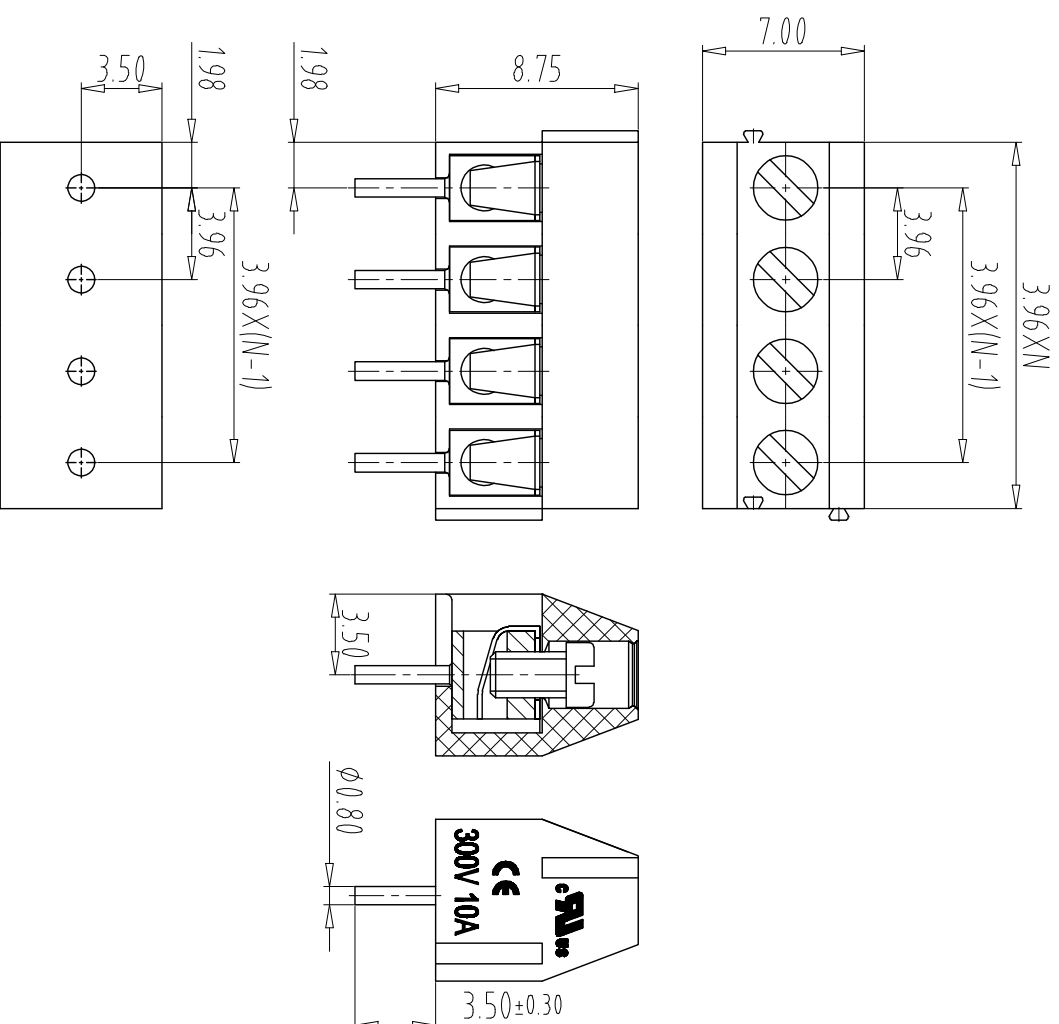

Total Pitch Tolerances	Nominal dimension range		=	—	//
A					

		m (mm)										m (mm)											
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all				
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	100	150				

+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.2	0.3	0.5
-------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-----	-----	-----	-----	-----

ITEM	NAME OF PART		NO. OF PART	Q-TY	MATERIAL		NOTE	
DWG.	L Z W	DATE	21.06.02	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE						



NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.	ULOTB17Y000A
--------	--------------