
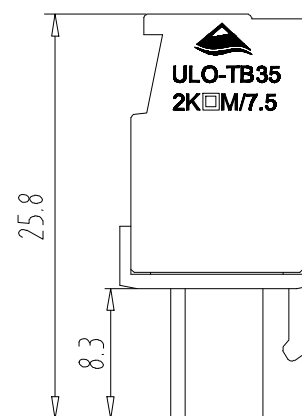


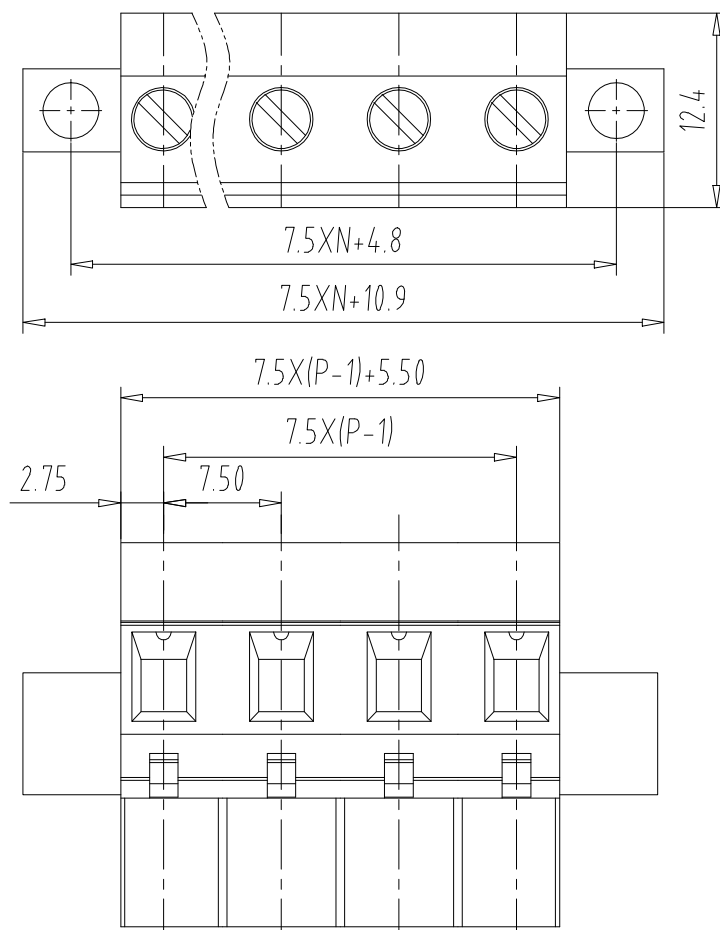

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	6.0KV
Rate Voltage(V)	400
Rate Current(A)	18A

3. Torque value: M3, 0.5Nm

5.Cover: PA66(UL94V-0)

4. RoHS Compliance

ULO-TB35 - 2KBM/7.5 - XXP - Y 0 0 0A

Customer requirements	
-----------------------	--

1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.05.04	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB35-2KBM/7.5-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO.	ULOTB35Y000A		