


FILE: 2020-D01VUL0					
REV	EC.N NO.	CONTENT		CHK	DATE

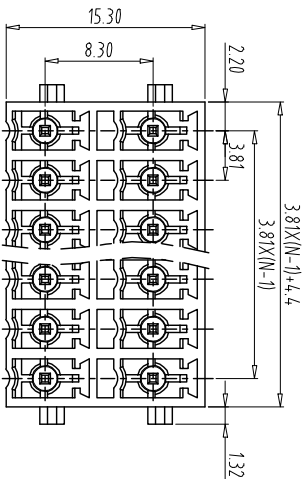

- NOTES1:
- UL Standard
1. Rating voltage/current: 300V//8A
2. withstanding voltage: AC1600V/1Min
- IEC Standard
- 1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 2x(02-24)P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

UL0-TB13 - 15KNVHG/3.81 - XXP - Y 0 0 0A

Certificate Factory poles Customer requirements




Series NO. Code

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

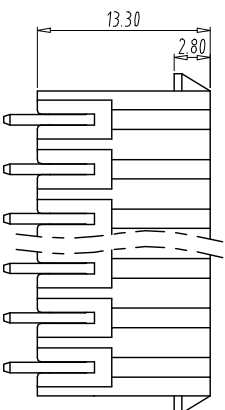

PCB Layout

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	10
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90
6									

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.02.26	UNITS	MM
CHK	DATE		SCALE	1:1	A4
APP.	DATE		NAME	UL0-TB13-15KNVHG/3.81-XXP-V000A	

NINGBO UL0 ELECTRONICS CO.,LTD.		DWGNO.	UL0TB13Y000A
---------------------------------	--	--------	--------------