



FILE: 2020-D01VUL0					
REV	ECN NO.	CONTENT		CHK	DATE

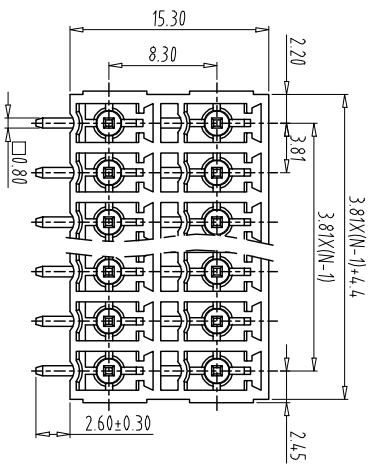

NOTES1:
UL Standard
1. Rating voltage/current: 300V//8A
2. withstanding voltage: AC1600V/1Min
IEC Standard
1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:
1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(Sn Plated)

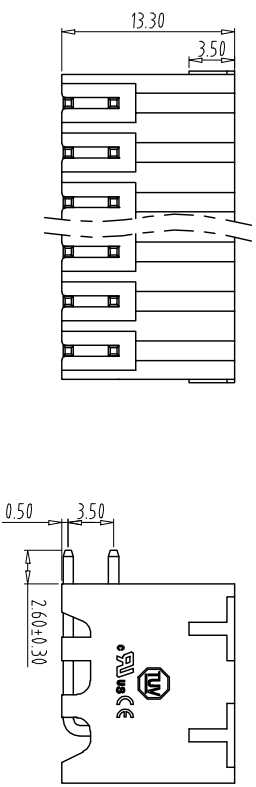

NOTES3:
1.Pitch: 3.81mm Poles: 2x(02-24)P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order

UL0-TB13 - 15KNRH/381 - XXP - Y 0 0 0A

Certificate Factory poles Customer requirements
Series NO. Code

color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

PCB Layout

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	0	over	30	over	53	over	70	over	90
to	30	to	53	to	70	to	90	to	115
30	53	70	90	115	150	200	250	0	30
to	30	to	53	to	70	to	90	to	115
53	70	90	115	150	200	250	320	30	53
to	30	to	53	to	70	to	90	to	115
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
6									5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.02.26	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB13-15KNRH/381-XXP-Y000A		