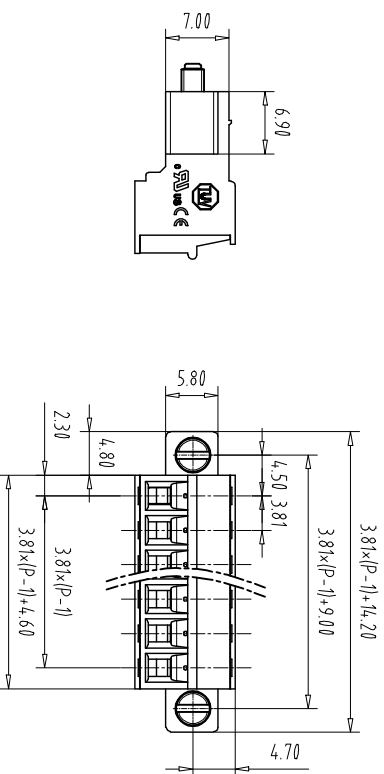
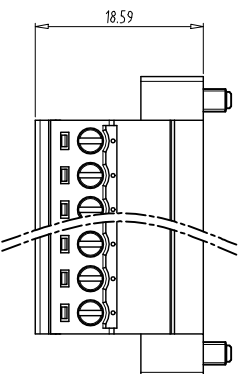


2		1	
REV	E.C.N NO.	CONTENT	CHK DATE

NOTES:

UL Standard

Use group	B	C	D
Rated Current	8A	—	8A
Rated Voltage	300V	—	300V

2. Wire range: 16~24AWG

IEC Standard

Pollution Degree	3	2	2
Over-voltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	8A	8A	8A

2. wire range: $0.2 \sim 1.5 \text{ mm}^2$, 1.5 mm^2 sol

3. Rating voltage/current: 160V/8A

NOTES:

1.Housing: PA66 (UL94V-0)

2.Cover: PA66 (UL94V-0)

3. (Cage:Brass (Ni Plated))

4.Pin: Brass (Sn Plated)

5. Screw: Steel (M2.Zn Plated)

6 Screw: Steel (M2.5 Zn Plated)

NOTES:

1.Pitch: 3.81mm Poles: 02-24P

2. Stripping length: 7-8mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

$$\frac{0.0 - 1.13}{1} = \frac{1.28 \cdot 1 / 3.01}{1} = \frac{\Delta \phi}{0.0 \text{ V}}$$

Effect of Ca^{2+} on Ca^{2+} release from the sarcoplasmic reticulum

Customer requirements

7
.
2
0

1:Grey 5:Orange

2:Blue 6:Red

3:Black 7:transparent

7. Green
8. Yellow

Q. Whit

Total Pitch Tolerances	Nominal dimension range	=	-	//
A				

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE	
DWG.	CKK	DATE	21.09.04	UNITS	MM	SHEET/OF 1/1
G/K.		DATE		SCALE	1 : 1	 
APP.		DATE				



NINGBO ULO ELECTRONICS CO., LTD
宁波欧路电子有限公司

INVOICE	ULO-1B13-13
DWGNO.	ULOTB13Y000A