


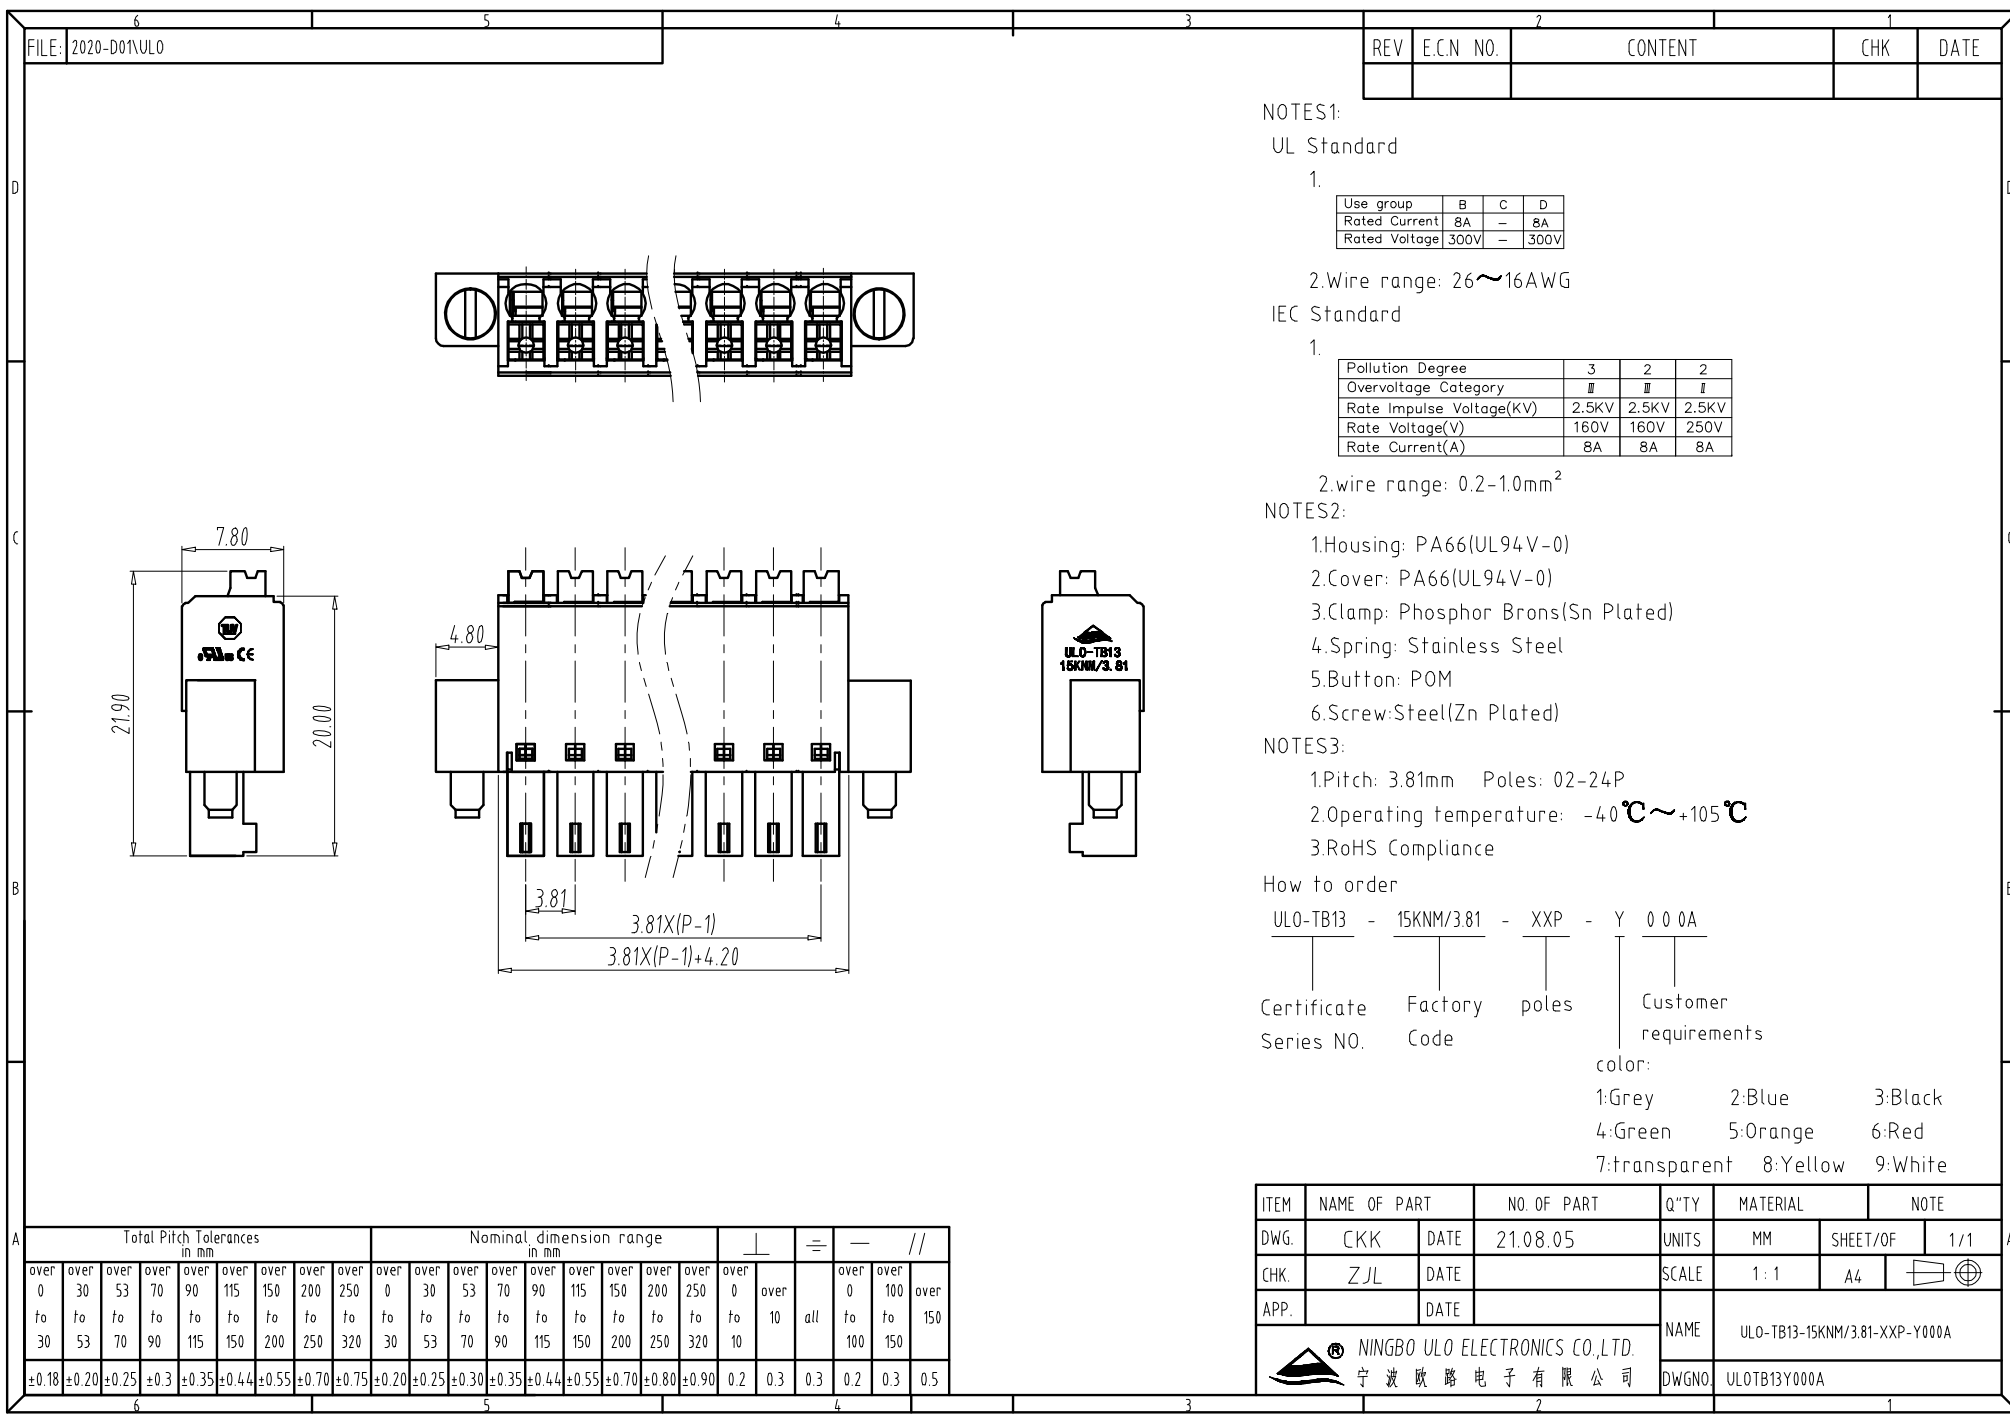

FILE: 2020-D01VUL0

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	8A	-	8A
Rated Voltage	300V	-	300V

2.Wire range: 26~16AWG

IEC Standard

1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

2.wire range: 0.2-1.0mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Clamp: Phosphor Brons(Sn Plated)
- 4.Spring: Stainless Steel
- 5.Button: POM
- 6.Screw:Steel(Zn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

ULO-TB13 - 15KNM/3.81 - XXP - Y 0 0 0 A

Certificate Series NO. Factory Code poles Customer requirements

color:

1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	CKK	DATE	21.08.05	UNITS	MM
CHK.	ZJL	DATE		SCALE	1:1
APP.	DATE				
				NAME	ULO-TB13-15KNM/3.81-XXP-Y000A
				DWGNO.	ULOTB13Y000A