


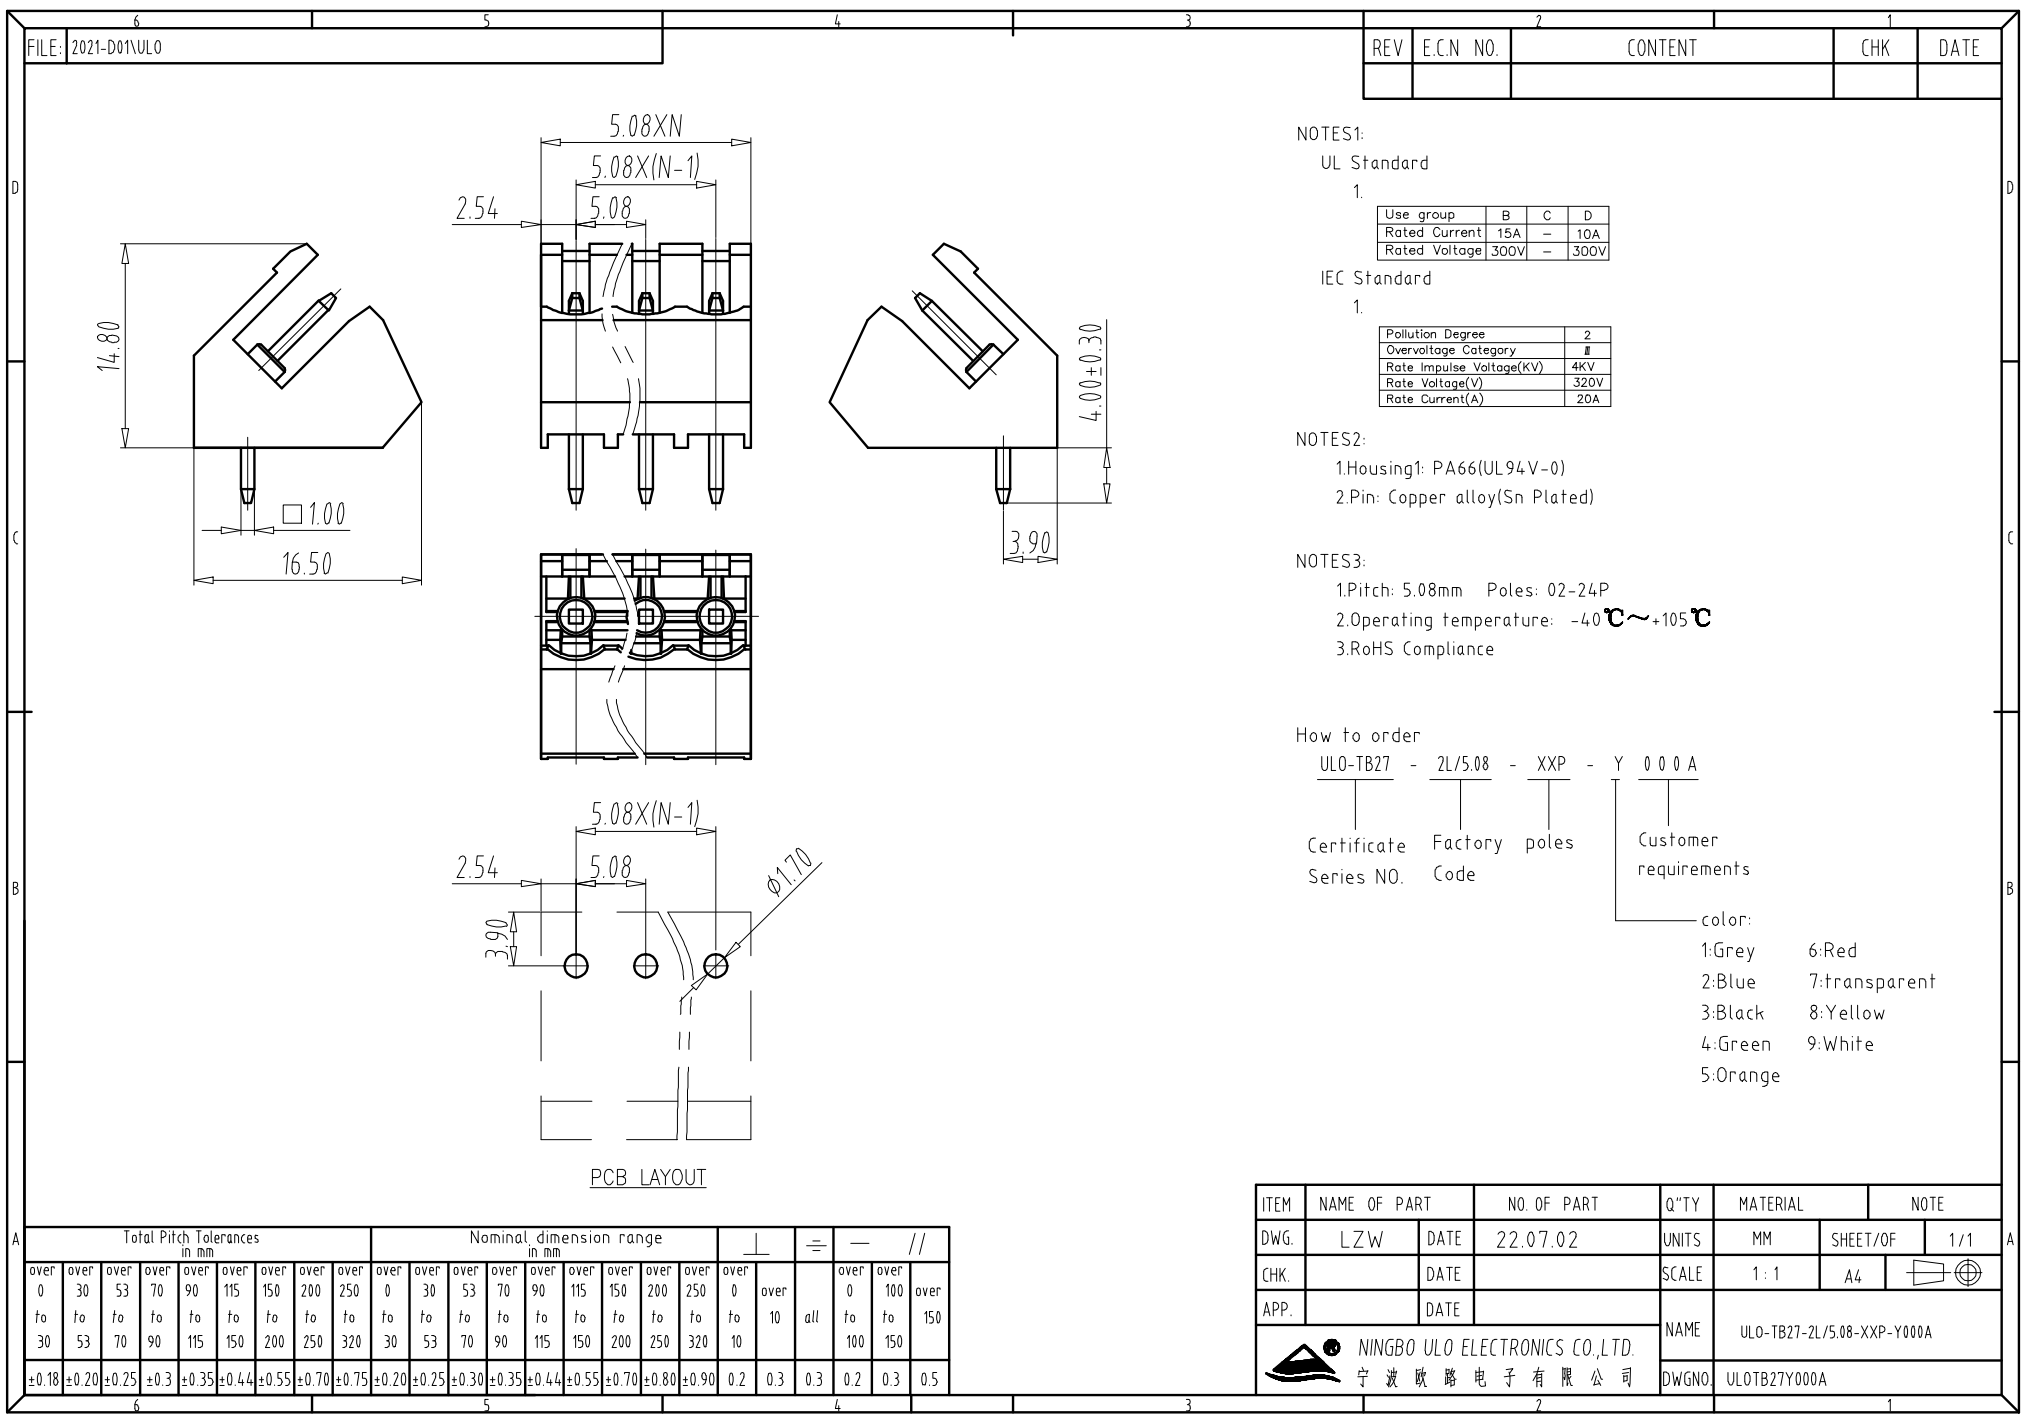

FILE: 2021-D01\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES2:

- 1.Housing1: PA66(UL94V-0)
- 2.Pin: Copper alloy(Sn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

ULO-TB27 - 2L/5.08 - XXP - Y 0 0 0 A

Certificate Series NO. Factory Code poles Customer requirements

color:

1:Grey 6:Red

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:Orange

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.07.02	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	ULO-TB27-2L/5.08-XXP-Y000A
				DWGNO.	ULOTB27Y000A