


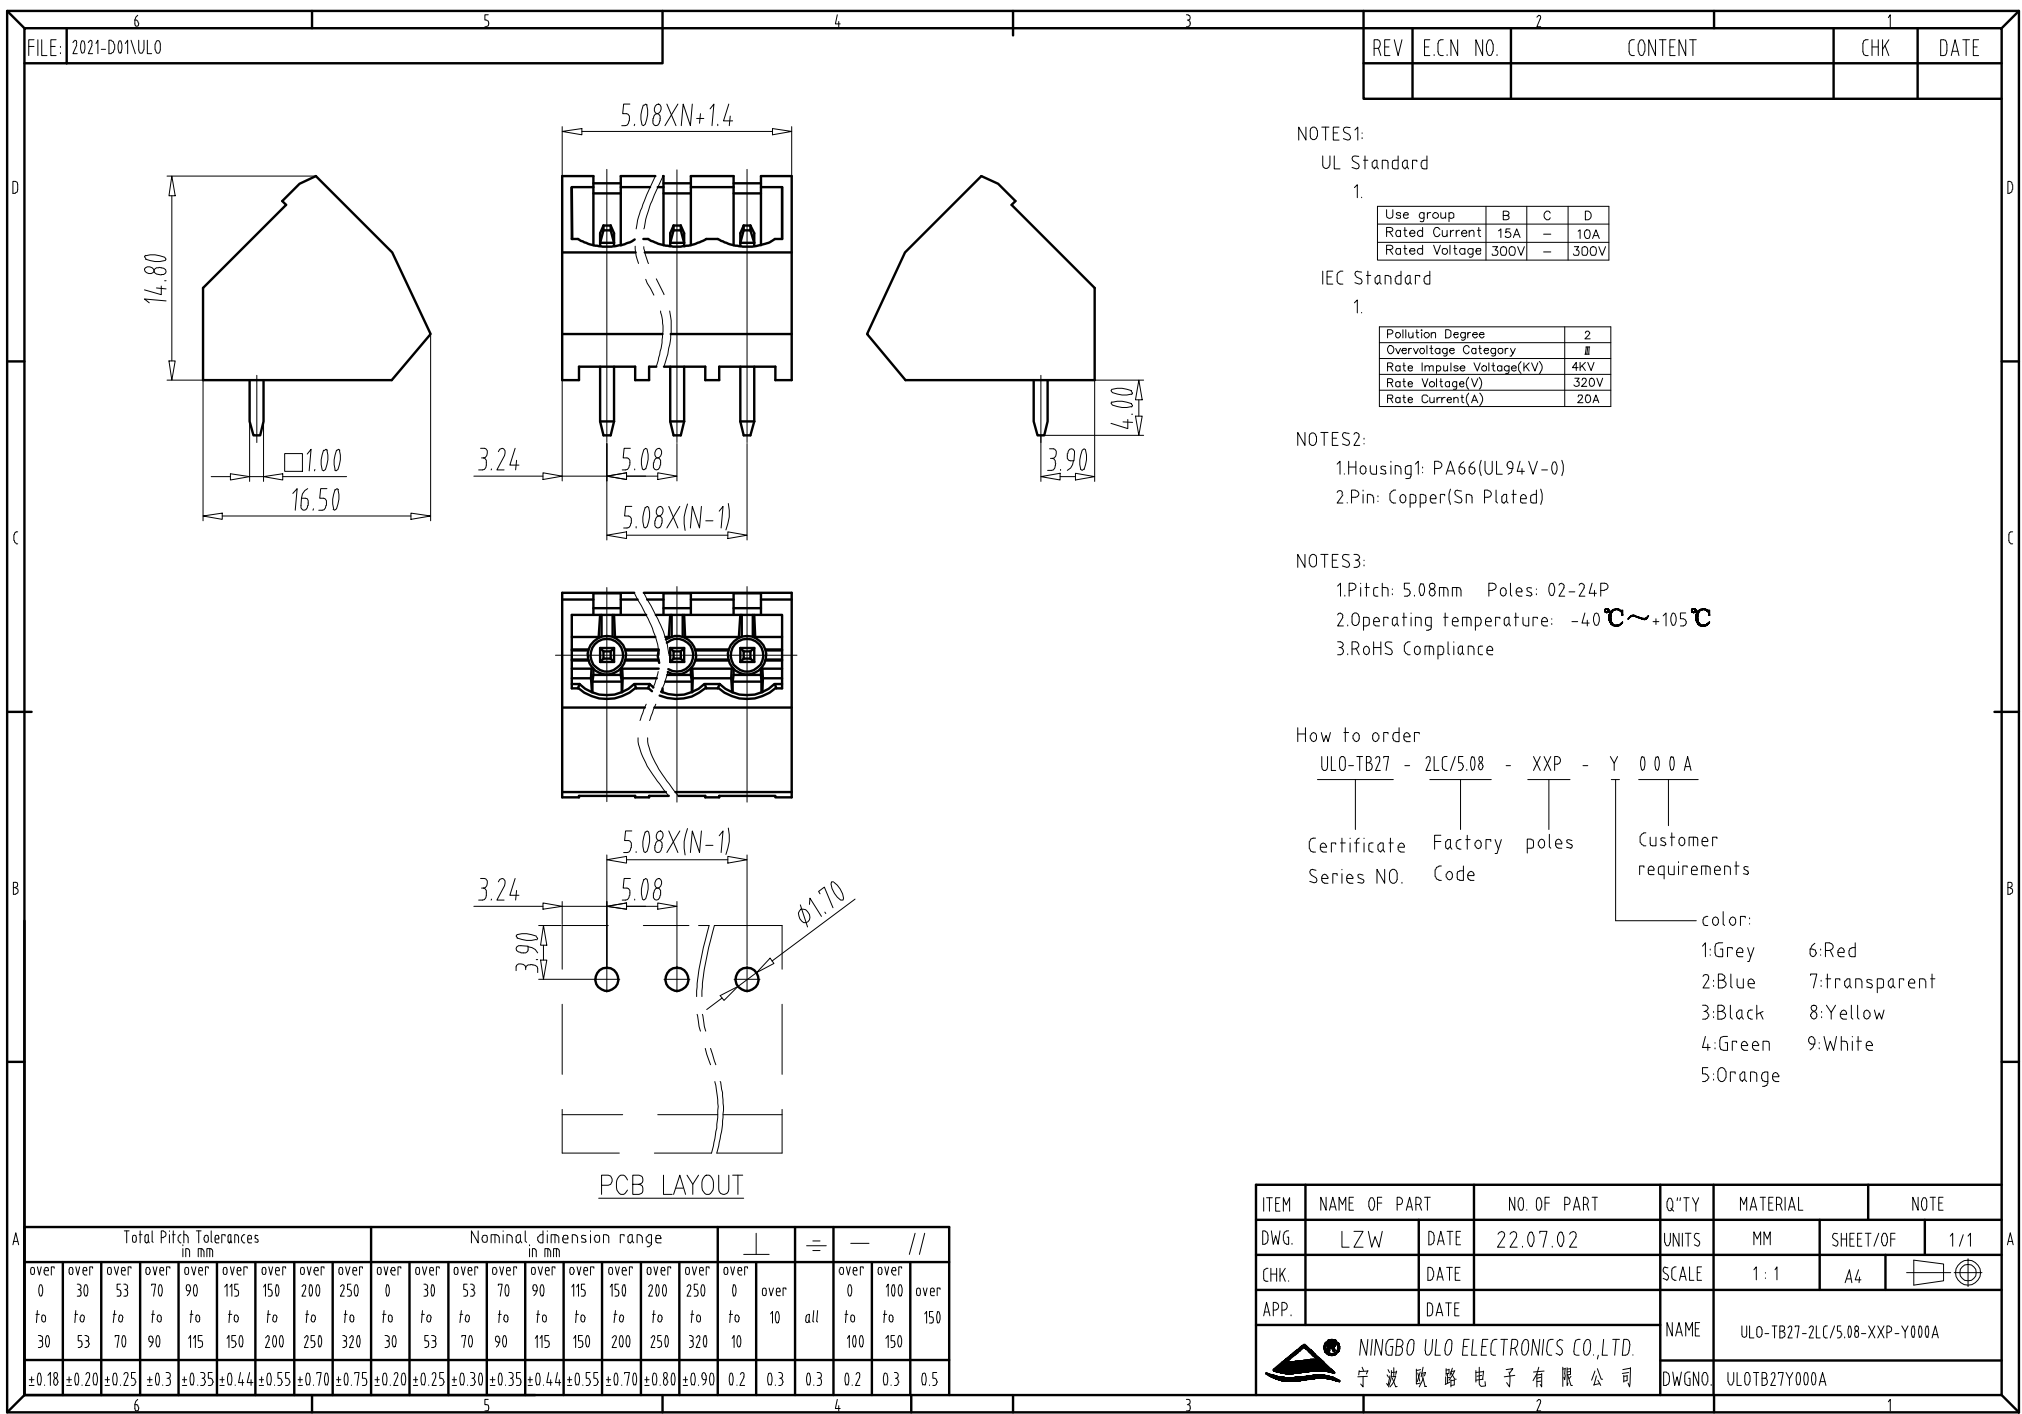

FILE: 2021-D01\UL0

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES2:

- 1.Housing1: PA66(UL94V-0)
- 2.Pin: Copper(Sn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

UL0-TB27 - 2LC/5.08 - XXP - Y 000A

Certificate Series NO. Factory Code poles Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.07.02	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	UL0-TB27-2LC/5.08-XXP-Y000A
				DWGNO.	UL0TB27Y000A

NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司