
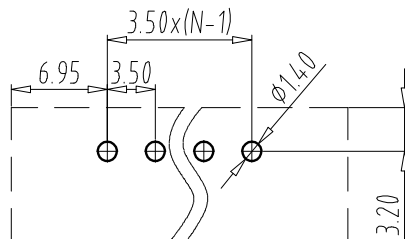



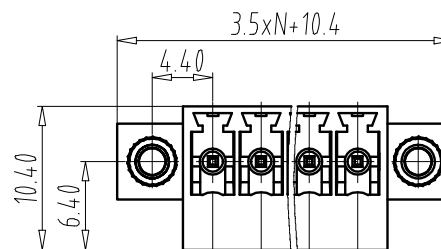


FILE: 2021-D01VUL0

REV E.C.N NO. CONTENT CHK DATE



PCB LAYOUT

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	8A	-	8A
Rated Voltage	300V	-	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	12A

NOTES2:

- 1.Housing1: PA66(UL94V-0)
- 2.Pin: Copper alloy(Sn Plated)
- 3.Nut: Copper alloy

NOTES3:

- 1.Pitch: 3.5mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

UL0-TB01 - 15LM/3.5 - XXP - Y 0 0 0 A

Certificate Series NO. Factory Code poles Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.07.04	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	UL0-TB01-15LM/3.5-XXP-Y000A
				DWGNO.	UL0TB01Y000A



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司

Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$	$//$	
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 100	over 150	
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 300	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 100	to 150		
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.5