

REV	E.C.N. NO.	CONTENT	CHK	DATE

NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	10A	10A	10A
Rated Voltage	300V	300V	300V

2. Wire range: 22~16AWG

IEC Standard

1

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	450V
Rate Current(A)	15A

2.wire range: 0.2-1.5mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.End Cover: PA66(UL94V-0)
- 3.Solder Pin: Brass(5n Plated)
- 4.Lever: PA66(UL94V-0)
- 5.Spring Coil : Stainless

NOTES:

- 1.Pitch: 7.5mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance


How to order

UL0-TB18	-	142R/7.5	-	XXP	-	Y	0 0 0 A
----------	---	----------	---	-----	---	---	---------

Certificate Series NO.	Factory Code	poles
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
9	9	9
10	10	10
11	11	11
12	12	12
13	13	13
14	14	14
15	15	15
16	16	16
17	17	17
18	18	18
19	19	19
20	20	20
21	21	21
22	22	22
23	23	23
24	24	24
25	25	25
26	26	26
27	27	27
28	28	28
29	29	29
30	30	30
31	31	31
32	32	32
33	33	33
34	34	34
35	35	35
36	36	36
37	37	37
38	38	38
39	39	39
40	40	40
41	41	41
42	42	42
43	43	43
44	44	44
45	45	45
46	46	46
47	47	47
48	48	48
49	49	49
50	50	50
51	51	51
52	52	52
53	53	53
54	54	54
55	55	55
56	56	56
57	57	57
58	58	58
59	59	59
60	60	60
61	61	61
62	62	62
63	63	63
64	64	64
65	65	65
66	66	66
67	67	67
68	68	68
69	69	69
70	70	70
71	71	71
72	72	72
73	73	73
74	74	74
75	75	75
76	76	76
77	77	77
78	78	78
79	79	79
80	80	80
81	81	81
82	82	82
83	83	83
84	84	84
85	85	85
86	86	86
87	87	87
88	88	88
89	89	89
90	90	90
91	91	91
92	92	92
93	93	93
94	94	94
95	95	95
96	96	96
97	97	97
98	98	98
99	99	99
100	100	100

Customer requirements

1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

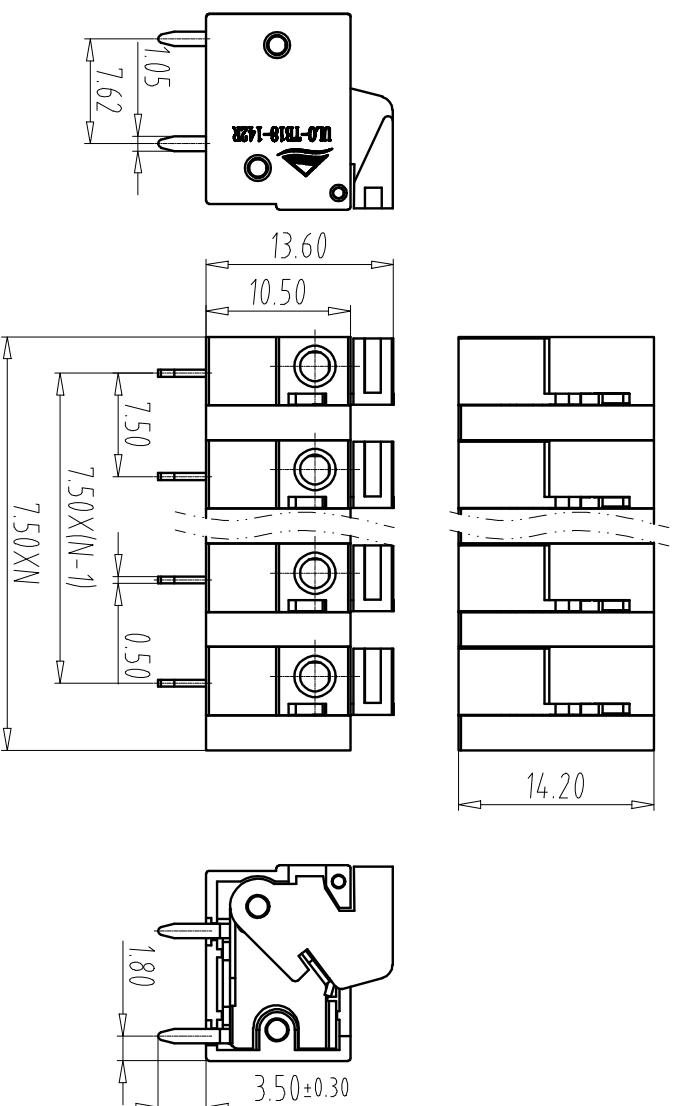

Total Pitch Tolerances	Nominal dimension range	=	-	//
A				

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	LZW	DATE 21.06.08	UNITS	MM	SHEET/OF 1/1
CHK		DATE	SCALE	1 : 1	A4
APP.		DATE			
NINGBO UL0 ELECTRONICS CO.,LTD.			UL0-1B18-142R/7.5-XXP-Y000A		
宁波欧路电子有限公司			UL01B18Y000A		
			DWGNO		