

FILE: 2020-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	10A	10A	10A
Rated Voltage	300V	300V	300V

2 Wire range: 16~22AWG
IEC Standard

Pollution Degree	3	2	2
Over-voltage Category	II	II	I
Rate impulse Voltage(kV)	-	4kV	-
Rate Voltage(V)	-	480V	-
Rate Current(A)	-	15A	-

NOTES2:
2 wire range: 0.2-15mm²






- 1.Housing: PA66(UL94V-0)
2.End Cover: PA66(UL94V-0)
3.Solder Pin: Brass(Sn Plated)
4.Lever: PA66(UL94V-0)
5.Spring Coil : Stainless

NOTES3:

- 1.Pitch: 7.5mm Poles: 02-24P
2.Stripping length: 10mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order
UL0-TB18 - 142V/7.5 - XXP - Y 0.0 0A
Certificate Factory poles
Series NO. Code

- Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

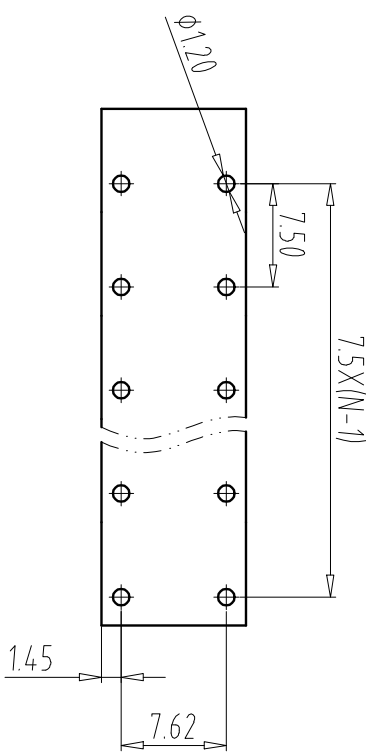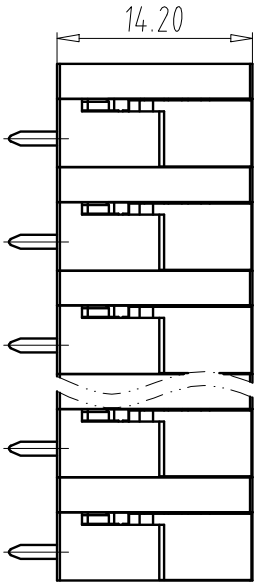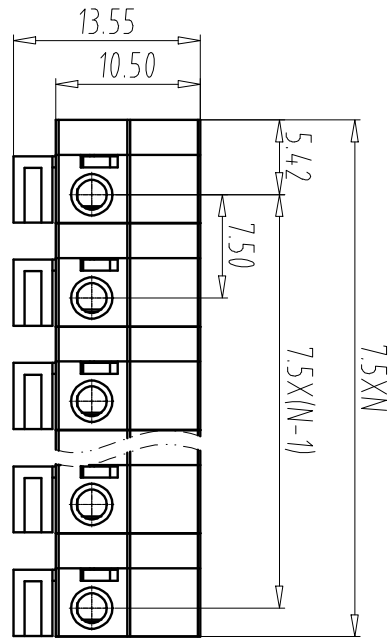

Total Pitch Tolerances	in mm												Nominal dimension range	in mm										—	//
------------------------	-------	--	--	--	--	--	--	--	--	--	--	--	-------------------------	-------	--	--	--	--	--	--	--	--	--	---	----

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	10	all	100	150	150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.06.07	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-TB18-142V/7.5-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO	UL0TB18Y000A