

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 14~22AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	I
Rate Impulse Voltage(KV)	—	2kV	—
Rate Voltage(V)	—	250V	—
Rate Current(A)	—	20A	—

2.wire range: 1.0-2.5mm²

NOTES:

- 1.Housing: PA66(UL94 V-0)
- 2.Pin: Copper alloy(Sn Plated)
- 3.Screw: Steel(Zn Plated)
- 4.Spring: Stainless steel

NOTES:

- 1.Pitch: 5.0mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order


UL0-TB25	-	167R/5.0	-	XXP	-	Y	0	0	0	A
----------	---	----------	---	-----	---	---	---	---	---	---

Certificate Series NO.	Factory Code	poles

Customer requirements

— color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

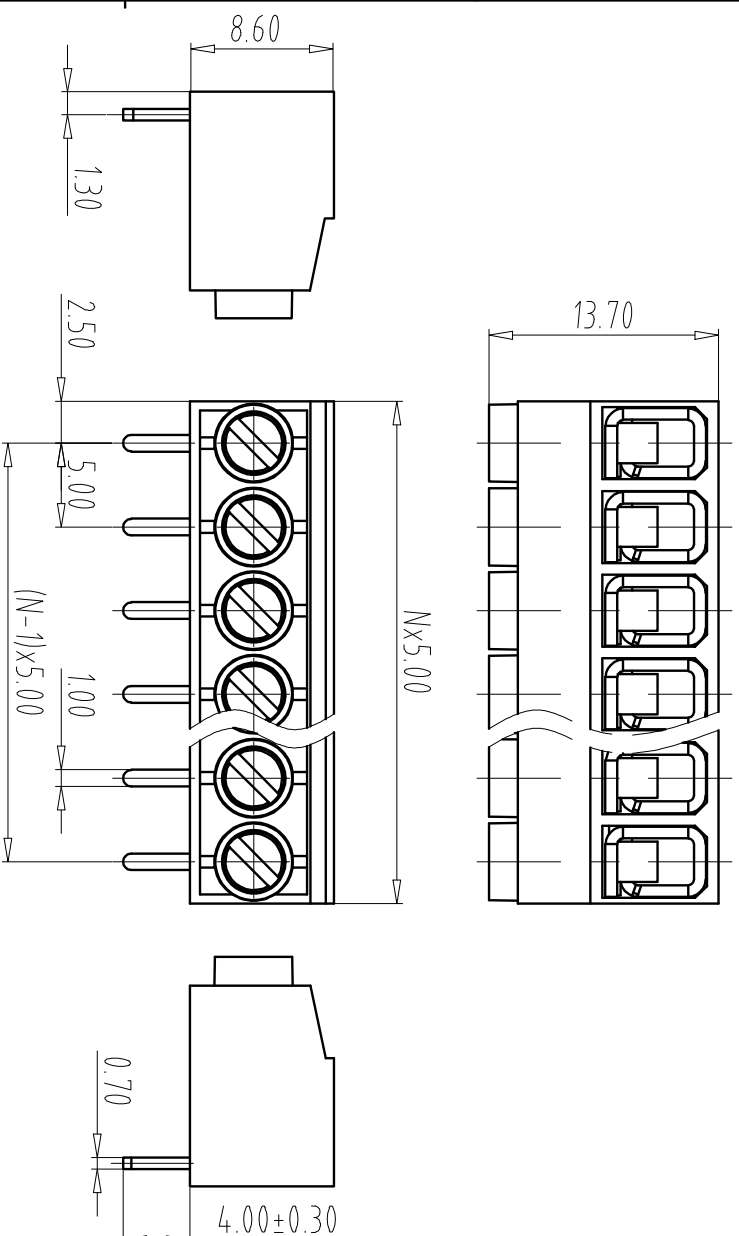

PCB LAYOUT

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZw	DATE 22.04.14	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1 : 1	A4
APP.	DATE				
NINGBO ULIO ELECTRONICS CO.,LTD.			NAME	ULIO-B25-16TR/5.0-XXP-Y000A	
宁波欧路电子有限公司			DWGNO	UL01B25Y000A	
					



NINGBO UL0 ELECTRONICS CO.,LTD
宁波欧路电子有限公司

INFILE	OLU-1BZ3-107
DWGNO	ULOTB25Y000A

NY 2.0-NAF-1000A