

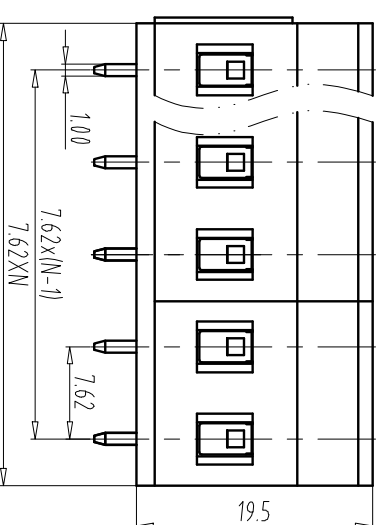
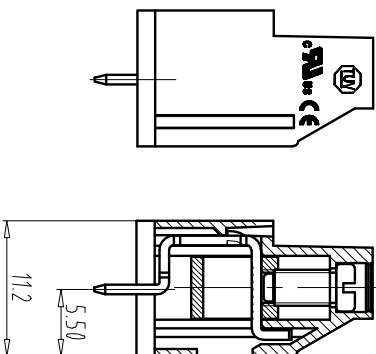


		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

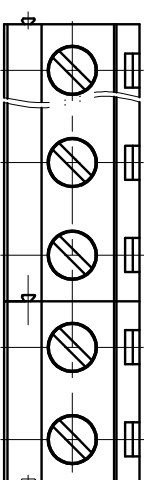

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	6.0/0K
Rate Voltage(V)	450
Rate Current(A)	20A

1.

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V
 2. Wire range: 26~12AWG
 3. Torque value: M3, 4, 4.3lb.in
- IEC Standard

NOTES:

UL Standard

2. Wire range: 0.5~2.5mm²
3. Torque value: M3, 0.5Nm

NOTES:

- 1.Housing: PA66(UL94 V-0)
- 2.Pin Header: Brass(Sn Plated)
- 3.Cage: Brass(Ni Plated)
- 4.Screw: Steel(M3,Zn Plated)

NOTES:

- 1.Pitch: 7.62mm Poles: 02-24P
2.Stripping length: 8mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB43	-	129C/7.62	-	XXP	-	Y	0 0 0 A
----------	---	-----------	---	-----	---	---	---------

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

—color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances	Nominal dimension range	+	-	//
A				

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	2022.03.15	MM	SHEET/OF 1/1

GHK.	DATE	SCALE	1:1	A4	
APP.	DATE				



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

NAME	020-1045-1234 / 02-KAT-1000A
DWGNO	U10TB434000A