


FILE: 2021-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE

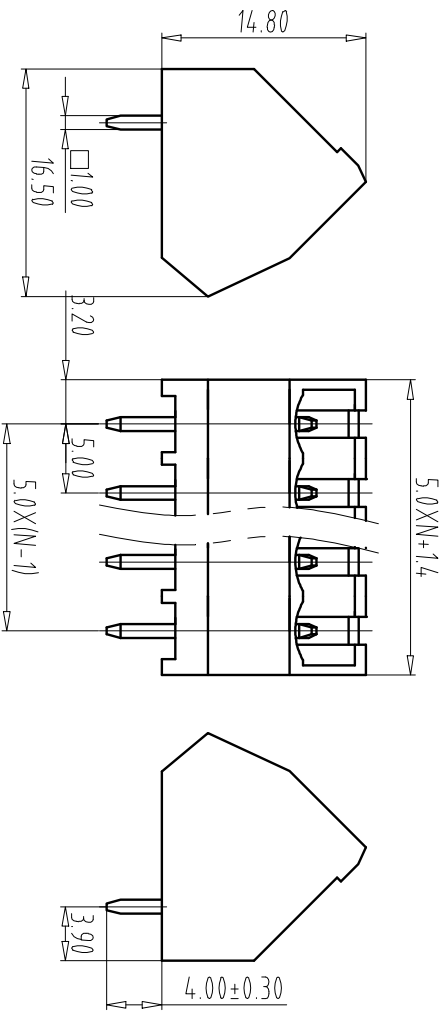

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES2:

1.Housing1: PA66(UL 94V-0)

2.Pin: Copper(Sn Plated)

NOTES3:

1.Pitch: 5.0mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

UL0-TB21 - 2LC/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

PCB LAYOUT

Total Pitch Tolerances										Nominal dimension range										±	=	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	0	100	over	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10		100	to	150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	22.07.02	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	UL0-TB21-2LC/5.0-XXP-Y000A		
		DWGNO	UL0TB21Y000A		