

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	10A

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Pin header1: Copper(Sn Plated)
- 4.Pin header2: Copper(Sn Plated)
- 5.Nut: Copper alloy

NOTES:

- 1.Pitch: 5.0mm Poles:04-48P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order





UL0-TB22 - 2RTM/5.0 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles

Customer requirements

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

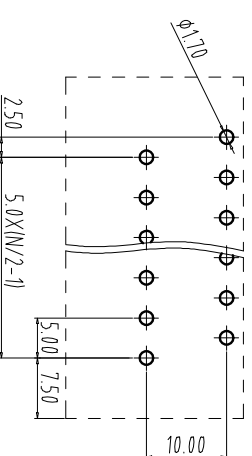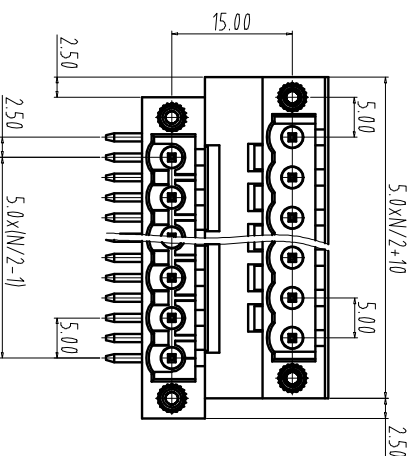

PCB LAYOUT

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE 2021.03.19	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	A4
APP.	DATE		NAME	UL0-TB2Z-2RTM/5.0-XXP-Y000A	
NINGBO UL0 ELECTRONICS CO.,LTD			UL0TB2ZY000A		
宁波欧路电子有限公司			UL0TB2ZY000A		