

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1. Rating voltage/current: 300V/15A
- 2.withstanding voltage: AC1600V/1min

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	10A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Pin header1: Copper(Sn Plated)
- 3.Cover: PA66(UL94V-0)
- 4.Pin header2: Copper(Sn Plated)
- 5.Nut: Copperalloy

NOTES:

- 1.Pitch: 5.0mm Poles:04-48P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

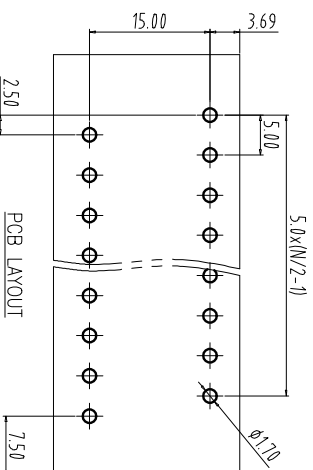



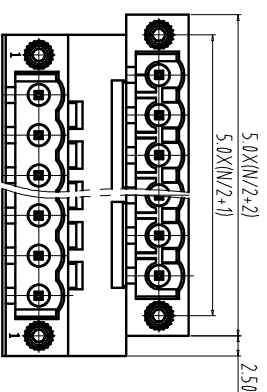
How to order

U/L0-TB22 - 2V/TM/5.0 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles

Customer requirements

- 1: Grey
2: Blue
3: Black
4: Green
5: Orange
6: Red
7: transparent
8: Yellow
9: White

[illegible]

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE 2021.03.19	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	A4
APP.	DATE		NAME	U10-1B22-2V1T/M,5.0-XXP-Y000A	
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO	U10B22Y000A	
宁波欧路电子有限公司					



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.	ULOTB22Y000A
--------	--------------