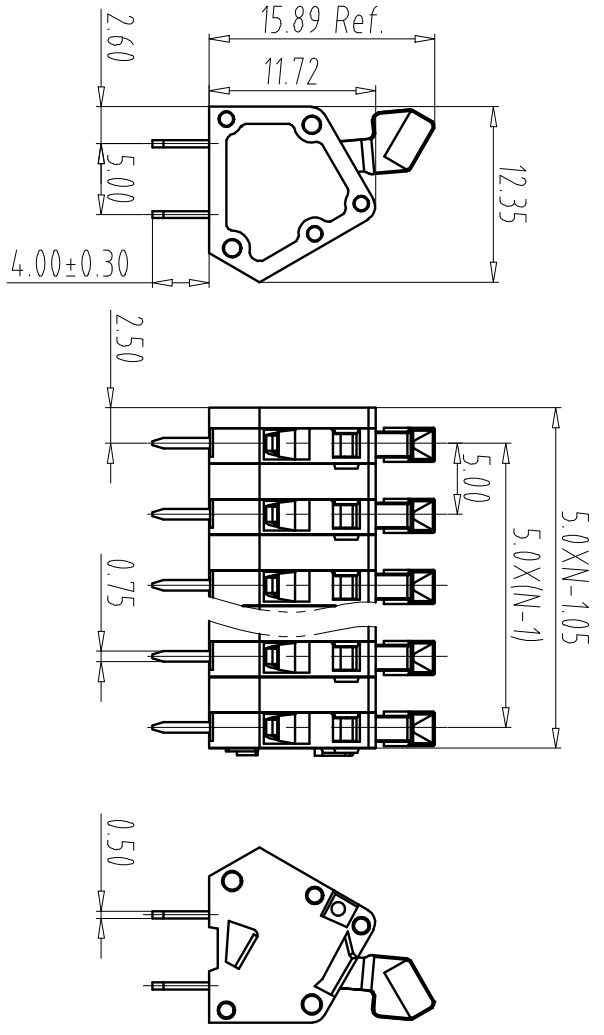


PCB LAYOUT

NOTES1:
UL Standard

1	Use group	B
	Rated Current	6A
	Rated Voltage	250V

2. Wire range: 14~28AWG

Pollution Degree	2
Overvoltage Category	I
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	300V
Rate Current(A)	4A

NOTES2:
2. wire range: 0.2-2.5mm²

NOTES3:
1. Pitch: 5.0mm Poles: 02-24P
2. Stripping length: 8mm
3. Operating temperature: -40℃~+105℃
4. RoHS Compliance

How to order
UL0-IB26 - 24U/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1: Grey
- 2: Blue
- 3: Black
- 4: Green
- 5: Orange
- 6: Red
- 7: transparent
- 8: Yellow
- 9: White

Total Pitch Tolerances			Nominal dimension range			±	=	—	//
in mm			in mm						
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	0
to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320	30	53
to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3
0.2	0.3	0.3	0.2	0.3	0.5				

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	22.04.14	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME	UL0-IB26-24U/5.0-XXP-Y000A		

NINGBO UL0 ELECTRONICS CO., LTD.

UL0TB26Y000A