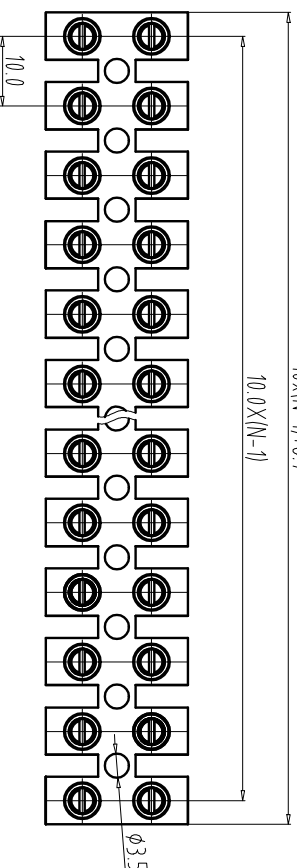


		2		1	
REV	E.C.N NO	CONTENT	CHK	DATE	

$$10 \times (N-1) + 6.7$$
 $10.0 \times (N-1)$ 

NOTES:

UL Standard

Use group	B	C	D
Rated Current	30A	—	10A
Rated Voltage	300V	—	300V

2. Wire range 18-10AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4kV
Rate Voltage(V)	450V
Rate Current(A)	41A

2. Wire range: 1.0-6mm²

NOTES:

- 1.Housing: PA66(UL94V-2)
- 2.Current carrier: Steel(Zn Plated)
- 3.Screw: Steel(Zn Plated)

NOTES:

- 1.Pitch: 10.0mm Poles: 02-24P
2.Stripping length: 9mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB - PA10HWP - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles	Customer requirements
---------------------------	-----------------	-------	--------------------------

color:

- | | | |
|----------------|-----------|----------|
| 1: Grey | 2: Blue | 3: Black |
| 4: Green | 5: Orange | 6: Red |
| 7: transparent | 8: Yellow | 9: White |

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZ W	DATE	UNITS	MM	1/1
CHK.	DATE		SCALE	1:1	A4
APP.	DATE				
NINGBO ULIO ELECTRONICS CO.,LTD.			ULIO-1B-PA10HWP-XPX-Y000A		
宁波欧路电子有限公司			DWGNO ULIOTB-Y000A		