

FILE: 2020-D01VUL0

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

NOTES:

UL Standard

1. Use group	B	C	D
Rated Current	30A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 18-10AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4kV
Rate Voltage(V)	450V
Rate Current(A)	41A

2. Wire range: 1.0-6mm²

NOTES2:

1. Housing: PA66(UL 94V-2)

2. Current carrier: Steel(Zn Plated)

3. Screw: Steel(Zn Plated)

NOTES3:

1. Pitch: 10.0mm Poles: 02-24P

2. Stripping length: 9mm

3. Operating temperature: -40℃~+105℃

4. RoHS Compliance

How to order

UL0-TB - PA10HSWP - XXP - Y 0 0 0A




Certificate Factory poles Customer requirements
Series NO. Code

color:
1: Grey 2: Blue 3: Black
4: Green 5: Orange 6: Red
7: transparent 8: Yellow 9: White

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.04.21	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	1/1
APP	DATE	NAME	UL0-TB-PA10HSWP-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO	UL0TBV000A	



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

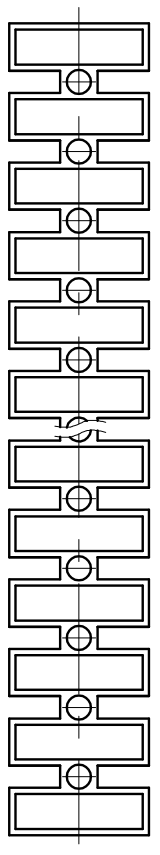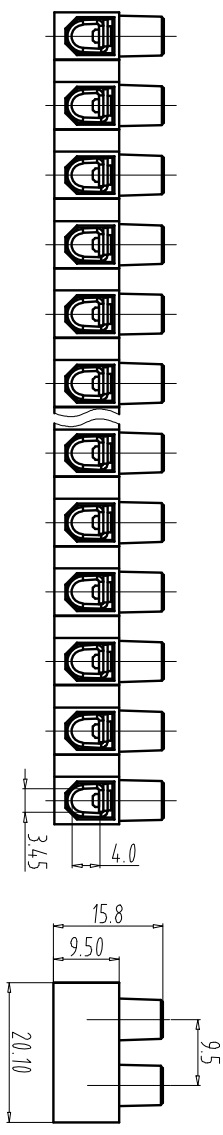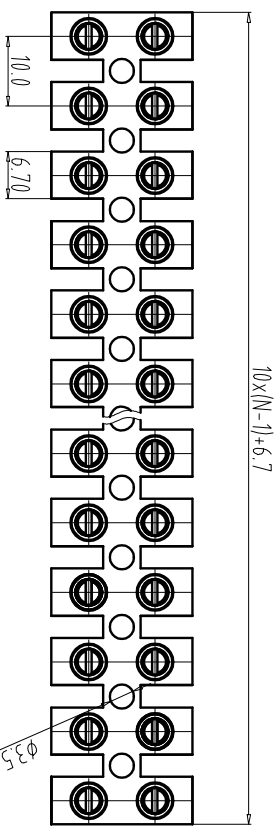

Total Pitch Tolerances		Nominal dimension range		Tolerance		Tolerance	
in mm		in mm		—		//	
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70