

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard



Use group	B	C	D
Rated Current	30A	—	10A
Rated Voltage	300V	—	300V

2. Wire range 18-10AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	4kV
Rate Voltage(V)	450V
Rate Current(A)	41A

2. Wire range: 1.0-6mm²

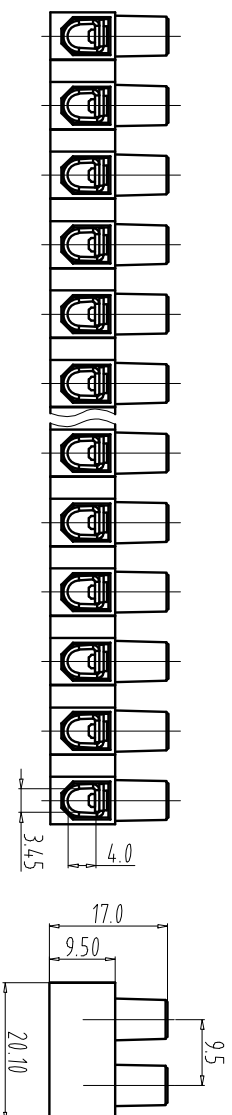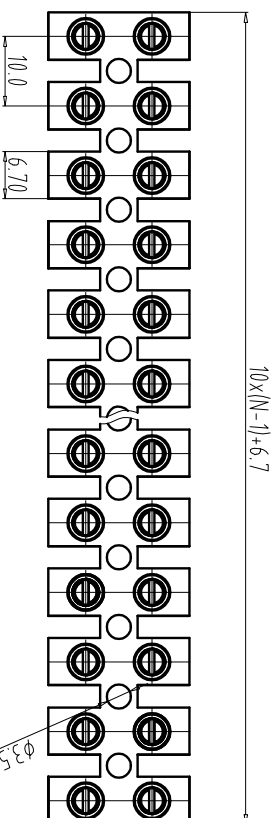

NOTES:

- 1.Housing: PA66(UL94V-2)
- 2.Current carrier: Steel(Zn Plated)
- 3.Screw: Steel(Zn Plated)

NOTES:

- 1.Pitch: 10.0mm Poles: 02-24P
2.Stripping length: 9mm
3.Operating temperature: -40°C~+105°C
4.RoHS Compliance

How to order

UL0-TB	-	PA10HS	-	XXP	-	Y	0	0	0A
--------	---	--------	---	-----	---	---	---	---	----

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

- | | | |
|----------------|-----------|----------|
| 1: Grey | 2: Blue | 3: Black |
| 4: Green | 5: Orange | 6: Red |
| 7: transparent | 8: Yellow | 9: White |

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	LZw	DATE 21.04.21	UNITS	MM	SHEET/OF	1/1
CHK.	DATE		SCALE	1:1	A4	
APP.	DATE		NAME			
NINGBO ULO ELECTRONICS CO.,LTD.			ULO-1B-PA10H-XXX-Y000A			
 宁波欧路电子有限公司			DWGNO UL01B7000A			



NINGBO ULO ELECTRONICS CO., LTD
宁波欧路电子有限公司

DWGNO. ULOTBY000A