

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V



2. Wire range14-10AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	3kV
Rate Voltage(V)	750V
Rate Current(A)	41A

2. Wire range0.75-6mm²

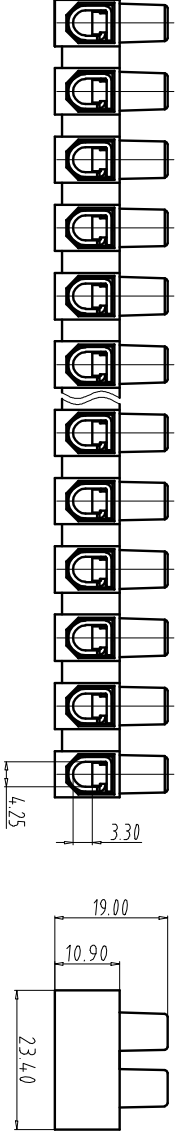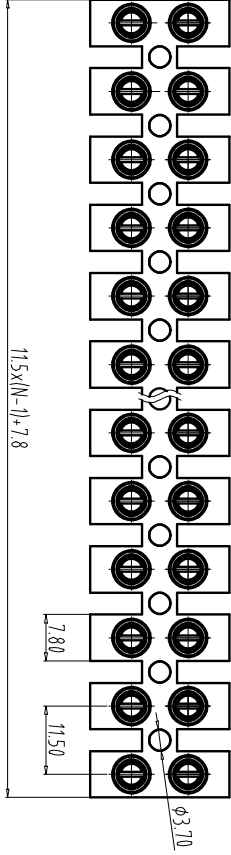

NOTES2:

1.Housing: PA66(UL 94V-2)

2.Current carrier: Steel(Zn Plated)

3.Screw: Steel(Zn Plated)

NOTES3:

1.Pitch: 11.5mm Poles: 02-24P

2.Stripping length: 9mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-TB - PA12HSWP - XXP - Y 0 0 0A

Certificate Factory poles Customer requirements
Series NO. Code

color:

- 1:Grey 2:Blue 3:Black
- 4:Green 5:Orange 6:Red
- 7:transparent 8:Yellow 9:white

Total Pitch Tolerances										Nominal dimension range										—	—	//
in mm										in mm												
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	150
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150
+0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3
6																			4			0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.04.21	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	1/1
APP	DATE	NAME	UL0-TB-PA12HSWP-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO	UL0TBV000A