

158.0

148.5

13.5

0.44


NOTES:
UL Standard
1. Use group B C D
Rated Current 50A - -
Rated Voltage 500V - -
2. Wire range 8-20AWG
IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	8kV
Rate Voltage(V)	750V
Rate Current(A)	57A

2. Wire range 2.5-10mm²

NOTES2:

- 1.Housing: PA66(UL 94V-2)
- 2.Current carrier: Steel(Zn Plated)
- 3.Screw: Steel(Zn Plated)

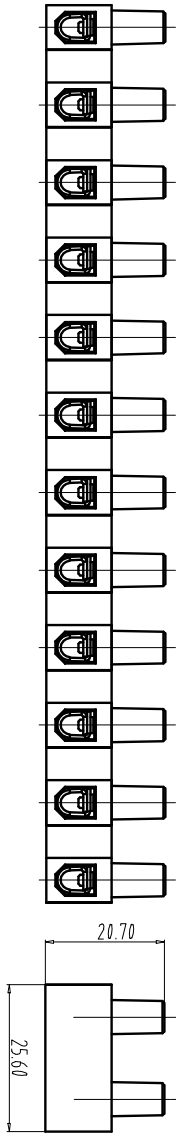

NOTES3:

- 1.Pitch: 13.5mm Poles: 12P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

UL0-TB - PA14HWP - 12P - Y 0 0 0A

Certificate Factory poles Customer requirements
Series NO. Code

color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:white

Total Pitch Tolerances		Nominal dimension range												—	//
in mm		in mm													
over	0	over	53	over	70	over	90	over	115	over	150	over	200	over	250
to	30	to	70	to	90	to	115	to	150	to	200	to	250	to	300
30	53	70	90	115	150	200	250	300	350	400	450	500	550	600	650
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.85	±0.90	±0.95	±1.00	±1.05	±1.10

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.04.21	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	1/1
APP	DATE	NAME	UL0-TB-PA14HWP-12P-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO	UL0TBV000A	