

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES:

UL Standard

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 12~22AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	250V
Rate Current(A)	24A

2. Wire range: 0.5-2.5mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(M3/Ni Plated)
- 3.Solder Pin: Brass(Tin Plated)

NOTES:

1. Pitch: 8.25mm Poles: 02-24P
2. Operating temperature: -40°C ~ +105°C
3. RoHS Compliance

How to order




UL0-TB43 - 35R/B - XXP - Y 100 A

Certificate Series NO.	Factory Code	poles

Customer requirements

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

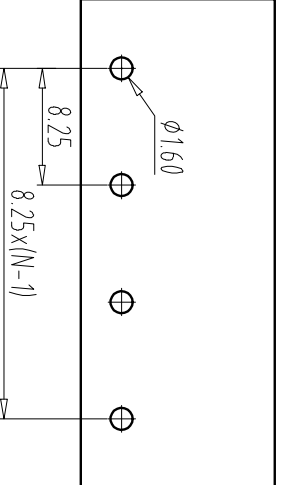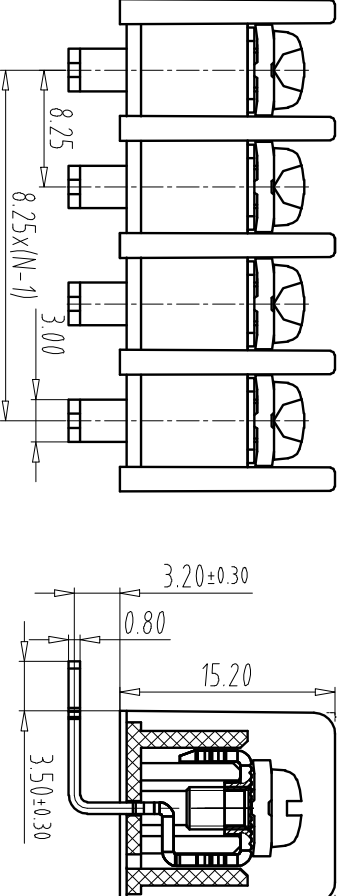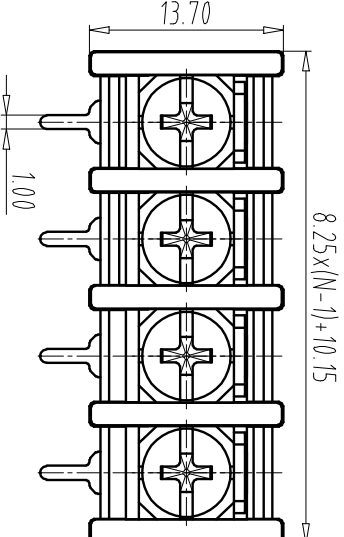

A	Total Pitch Tolerances	Nominal dimension range		±	—	//

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	LZ W	DATE	21.05.16	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1 : 1	A4
APP.		DATE		NAME		
NINGBO UL0 ELECTRONICS CO.,LTD				UL0-1B43-35B-XPD-Y100A		
宁波欧路电子有限公司				UL01B43Y100A		
				DWGNO		