

2			1	
REV	E.C.N NO.	CONTENT	CHK	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1




DIN EN 61 984

Inserts

1. Number of contacts:3+PE
2. Rated Current:10A
3. Rated Voltage conductor-ground:230V
4. Rated Voltage conductor-conductor:400V
5. Pollution degree:3
6. Rated impulse voltage:4KV
7. or:10A/250V/4KV/3
8. Insulation resistance: $\geq 10^{10} \Omega$
9. Material:Polycarbonate
10. Colour:RAL 7032 (Light grey)
11. Rated voltage acc. to UL/CSA:600V
12. Limiting temperatures:-40°C~+125°C
13. Flammability acc. to UL94:V0
14. Mechanical working life(mating cycles): ≥ 500

Contacts

1. Material:Copper alloy
2. Surface:hard-silver plated
3. Contact resistance: $\leq 2m \Omega$
4. Terminal:Screw terminal
5. Wire gauge:0.75-1.5mm² (18-16AWG)
6. tightening torque:0.25Nm
7. Stripping length:4.5mm
8. Rohs Compliance

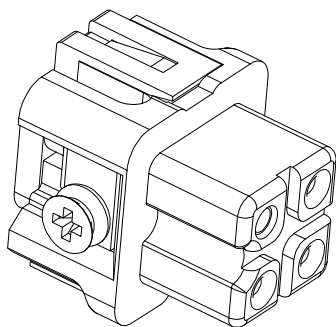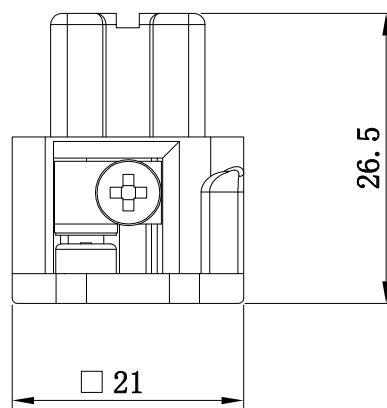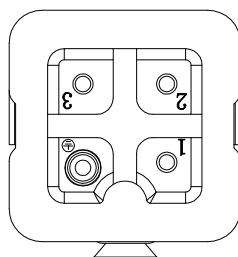

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZM	DATE	23.10.29	UNITS	MM	SHEET/OF	1 / 1	
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE			ULO-HD01-HA-003-F			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME				
				DWGNO.				