
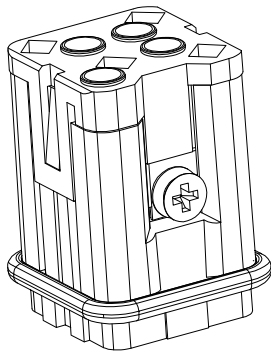
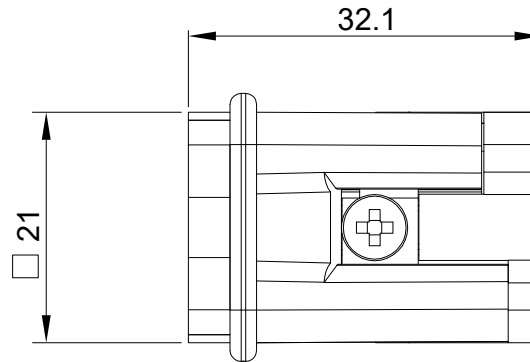


2		1		
REV	E.C.N NO.	CONTENT	CHK	DATE



Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

1. Number of contacts:3+PE
2. Rated Current:10A
3. Rated Voltage conductor-ground:230V
4. Rated Voltage conductor-conductor:400V
5. Pollution degree:3
6. Rated impulse voltage:4KV
7. or:10A/250V/4KV/3
8. Insulation resistance: $\geq 10^{10} \Omega$
9. Material:Polycarbonate
10. Colour:RAL 7032 (Light grey)
11. Rated voltage acc. to UL/CSA:600V
12. Limiting temperatures:-40°C ~ +125°C
13. Flammability acc. to UL94:V0
14. Mechanical working life(mating cycles): ≥ 500

Contacts

1. Material:Copper alloy
2. Surface:hard-silver plated
3. Contact resistance: $\leq 3m \Omega$
4. Terminal:Cage-clamp
5. Wire gauge:0.14-2.5mm² (26-14AWG)
6. Stripping length:9.0mm
7. Rohs Compliance

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE					
DWG.	LZM	DATE	23.11.1	UNITS	MM	SHEET/OF	1 / 1					
CHK.		DATE		SCALE	1 : 1	A4						
APP.		DATE			NAME ULO-HD01-HA-003-MS							
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME								
				DWGNO.								