

2		1		
REV	E.C.N NO.	CONTENT	CHK	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1




DIN EN 61 984

Inserts

- 1.Number of contacts:4+PE
- 2.Rated Current:10A
- 3.Rated Voltage conductor-ground:230V
- 4.Rated Voltage conductor-conductor:400V
- 5.Pollution degree:3
- 6.Rated impulse voltage:4KV
- 7.or:10A/250V/4KV/3
8. Insulation resistance: $\geq 10^{10} \Omega$
- 9.Material:Polycarbonate
- 10.Colour:RAL 7032 (Light grey)
- 11.Rated voltage acc. to UL/CSA:600V
- 12.Limiting temperatures:-40℃~+125℃
- 13.Flammability acc. to UL94:V0
- 14.Mechanical working life(mating cycles): ≥ 500

Contacts

- 1.Material:Copper alloy
- 2.Surface:hard-silver plated
- 3.Contact resistance: $\leq 2m \Omega$
- 4.Terminal:Sceew terminal
- 5.Wire gauge:0.75-1.5mm² (18-16AWG)
- 6.Tightening torque:0.25Nm
- 7.Stripping ledgth:4.5mm
- 8.Rohs Compliance

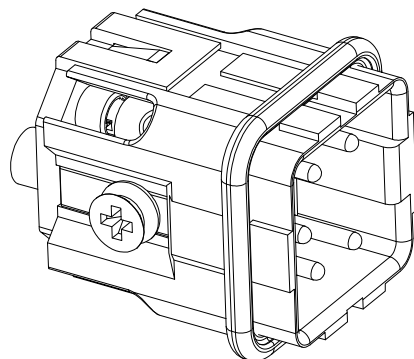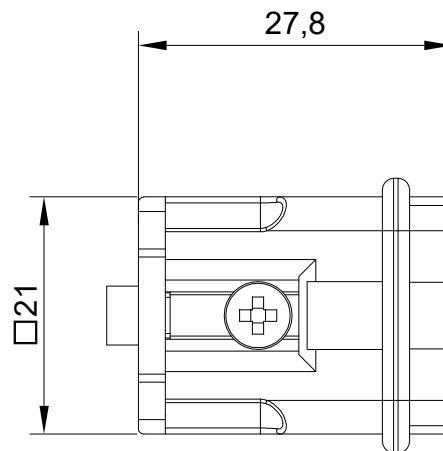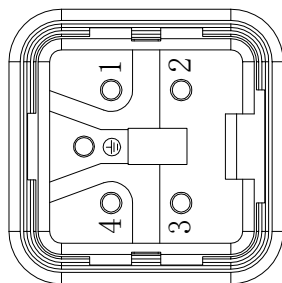

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZM	DATE	23.11.04	UNITS	MM	SHEET/OF	1 / 1	
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE		NAME	ULO-HD01-HA-004-M			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司								