
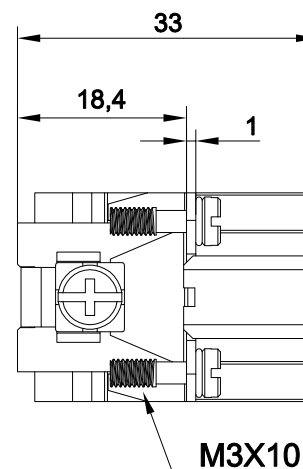


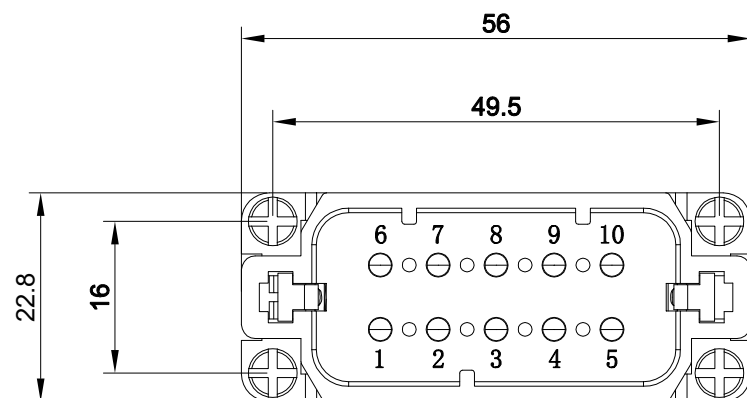

Technical characteristics:

Specifications

DIN EN 60 664-1


DIN EN 61 984

Inserts

1. Number of contacts: 10+PE
2. Rated Current: 16A
3. Rated Voltage: 250V
4. Pollution degree: 3
5. Rated impulse voltage: 4KV
6. Insulation resistance: $\geq 10^{10} \Omega$
7. Material: Polycarbonate
8. Colour: RAL 7032 (Light grey)
9. Rated voltage acc. to UL/CSA: 600V
10. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
11. Flammability acc. to UL94: V0
12. Mechanical working life (mating cycles): ≥ 500

Contacts

1. Material: Copper alloy
2. Surface: hard-silver plated
3. Contact resistance: $\leq 1\text{m} \Omega$
4. Terminal: Screw terminal
5. Wire gauge: 0.75-2.5mm² (18-14AWG)
6. Tightening torque: 0.5Nm
7. Stripping length: 7.5mm
8. RoHS Compliance

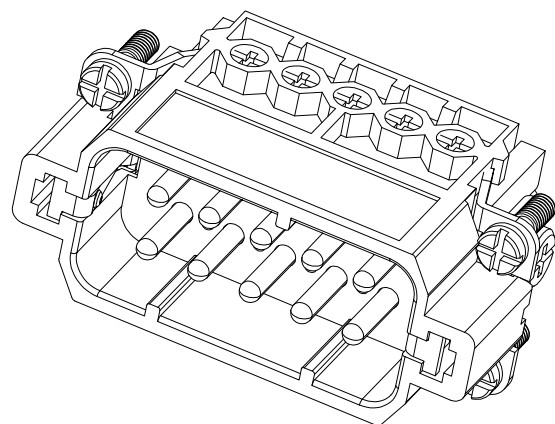

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	LZM	DATE	23.11.04	UNITS	MM	SHEET/OF		1 / 1
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE			ULO-HD01-HA-010-M			
[®] NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME				
				DWGNO.				

NINGBO ULO ELECTRONICS CO., LTD.
宁波欧路电子有限公司