
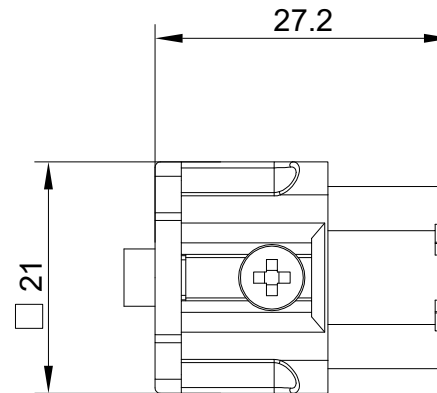


2		1		
REV	E.C.N NO.	CONTENT	CHK	DATE



Technical characteristics:

Specifications

DIN EN 60 664-1


DIN EN 61 984

Inserts

1. Number of contacts: 4+PE
2. Rated Current: 10A
3. Rated Voltage conductor-ground: 230V
4. Rated Voltage conductor-conductor: 400V
5. Pollution degree: 3
6. Rated impulse voltage: 4KV
7. or: 10A/250V/4KV/3
8. Insulation resistance: $\geq 10^{10} \Omega$
9. Material: Polycarbonate
10. Colour: RAL 7032 (Light grey)
11. Rated voltage acc. to UL/CSA: 600V
12. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
13. Flammability acc. to UL94: V0
14. Mechanical working life (mating cycles): ≥ 500

Contacts

1. Material: Copper alloy
2. Surface: hard-silver plated
3. Contact resistance: $\leq 3\text{m} \Omega$
4. Terminal: Screw terminal
5. Wire gauge: $0.75-1.5\text{mm}^2$ (18-16AWG)
6. Tightening torque: 0.25Nm
7. Stripping length: 4.5mm
8. RoHS Compliance

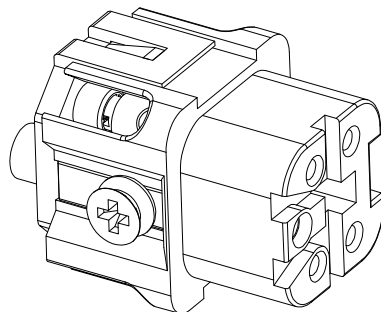

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	LZM	DATE	23.11.04	UNITS	MM	SHEET/OF	1 / 1	A
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE						
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME	ULO-HD01-HA-004-FS			
				DWGNO.				