

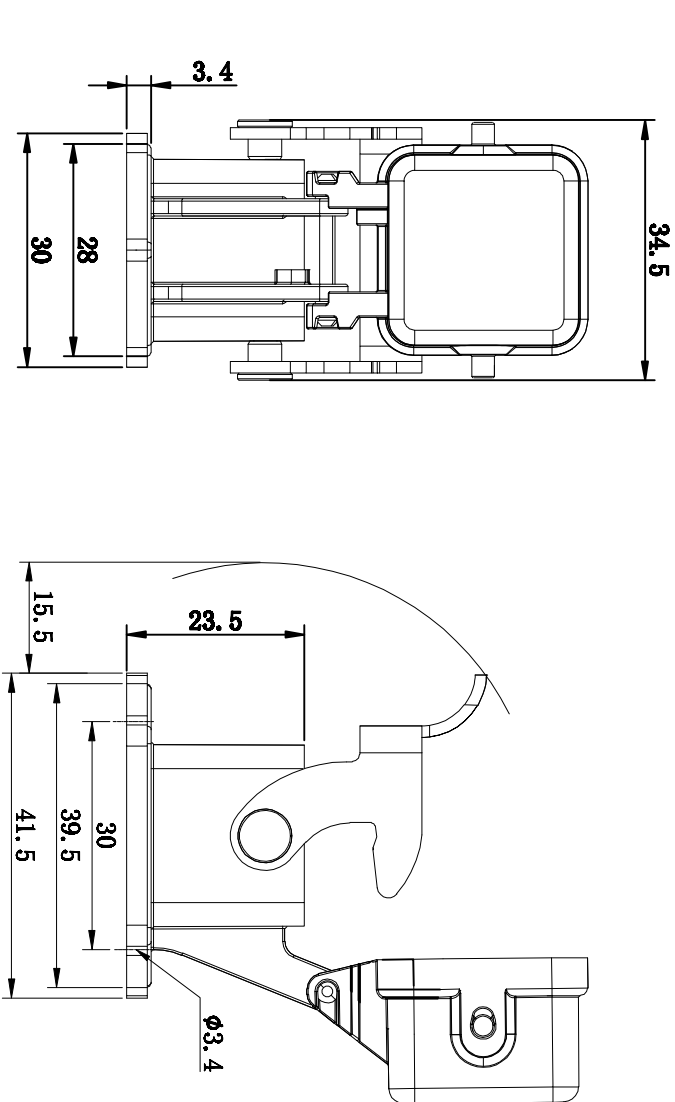


Type
UL0-HC01-H3A-BK-1L-MCV/M
UL0-HC01-H3A-BK-1L-MCV/F



Technical specification:

1. Material: zinc die-cast
2. Materia, coverl: zinc die-cast
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40℃ - +125℃
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Locking element:
locking type: single locking latch
material: stainless steel
8. Cable entry: bottom entry
9. Hoods/Housings sealing: NBR

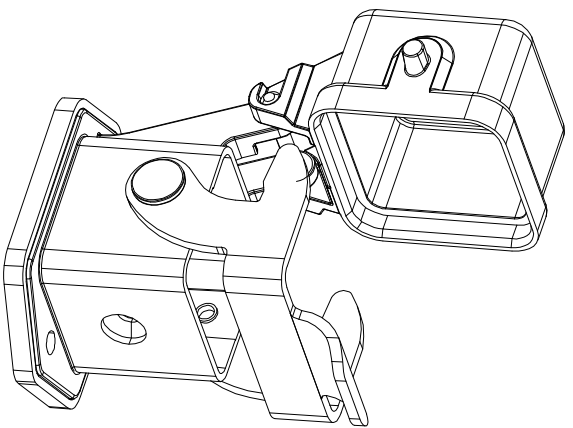

面板开孔图
panel cut out

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HC01-H3A-BK-1L-MCV-XX		

NINGBO UL0 ELECTRONICS CO., LTD.
宁波欧路电子有限公司

DWGNO.