



REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
ULO-HC01-H3A-SF-1L-M20			M20	
ULO-HC01-H3A-SF-1L-PG11			PG11	
ULO-HC01-H3A-SF-1L-PG13.5			PG13.5	

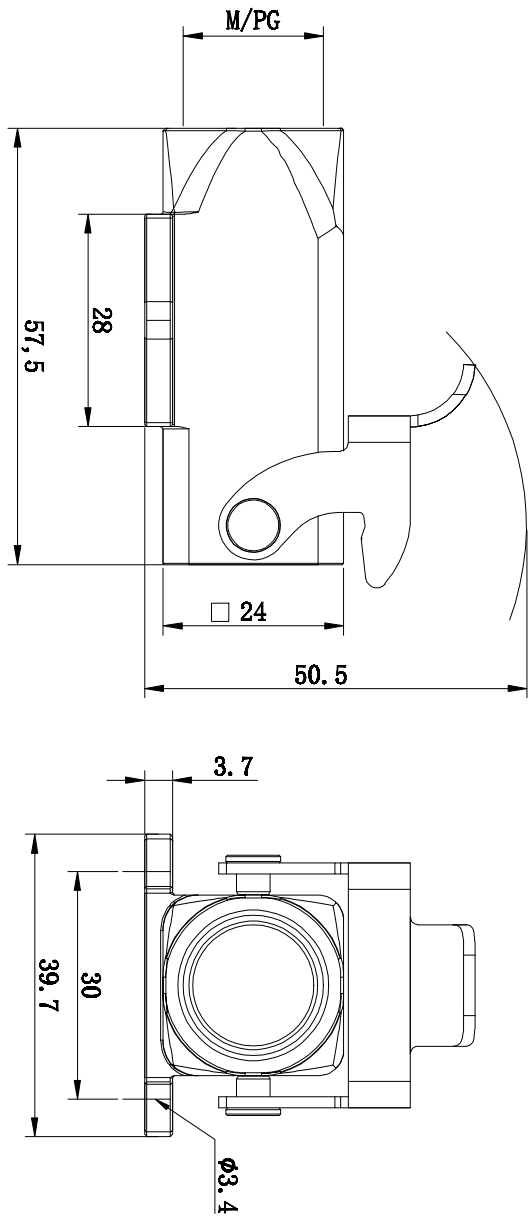

Technical specification:

1. Material: zinc die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40°C – +125°C
5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type: single locking latch
material: stainless steel
7. Cable entry: side entry

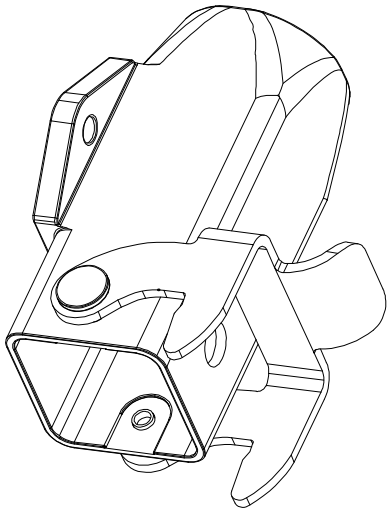

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC01-H3A-SF-1L-XX		

NINGBO ULO ELECTRONICS CO., LTD.
宁波欧路电子有限公司

DWGNO.