



REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/Pg)	
ULO-HC01-H3A-CCT-1L-M20			M20	
ULO-HC01-H3A-CCT-1L-PG11			PG11	
ULO-HC01-H3A-CCT-1L-PG13.5			PG13.5	

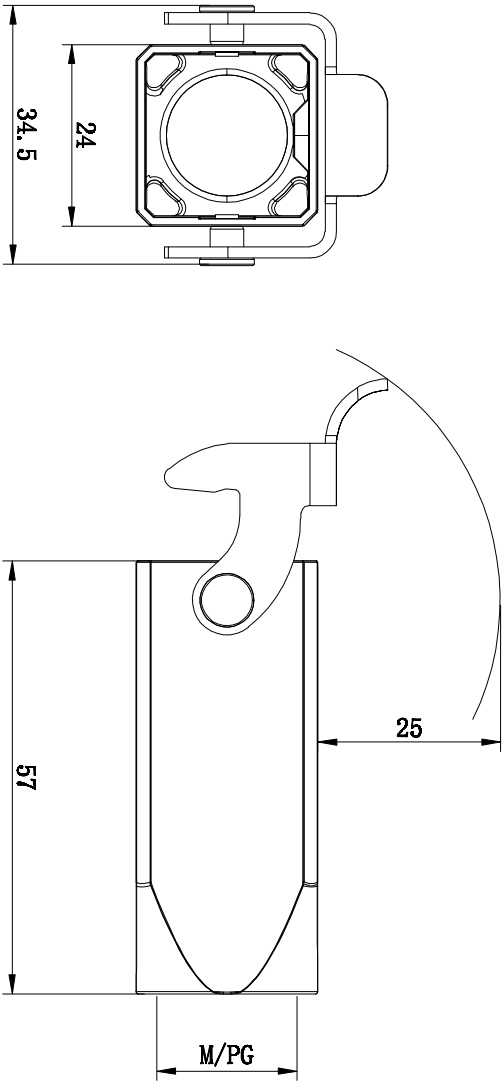

- Technical specification:
1. Material: zinc die-cast
 2. Surface: powder-coated
 3. Colour: (grey)
 4. Temperature range: -40℃ - +125℃
 5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
 6. Locking element:
locking type: single locking latch
material: stainless steel
 7. Cable entry: top entry

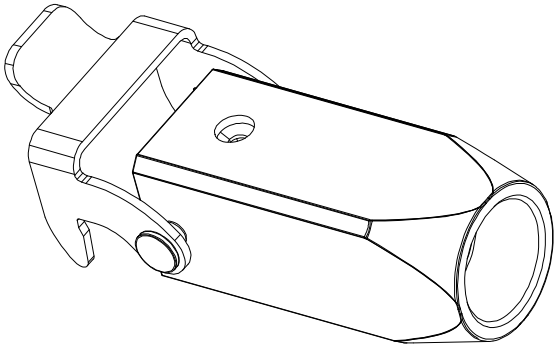

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC01-H3A-CCT-1L-XX		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.		

