

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:

UL Standard

1. Rating voltage/current: 300V/8A
2. withstanding voltage: AC1600V/1Min
3. Wire range: 16~24AWG

IEC Standard

1. Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	320V	160V	160V
Rate Current(A)	8A	8A	8A

2. wire range: 0.2~10mm², 15mm²sol

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Phosphor Brons (Sn Plated)
- 5.Spring: Stainless Steel


NOTES3:

- 1.Pitch: 3.50mm Poles: 2x(02-24)P
- 2.Stripping length: 8~9mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance




How to order
 UL0-TB01 - 15KN-B/381 - 2XXXP - Y 0.0 0A

Certificate Factory poles
 Series NO. Code

Customer requirements
 color:
 1:Grey 5:Orange
 2:Blue 6:Red
 3:Black 7:transparent
 4:Green 8:Yellow



SECTION A-A

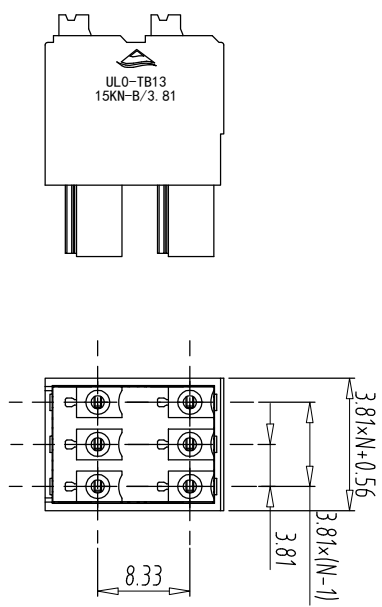

Total Pitch Tolerances		Nominal dimension range	
in mm	over	in mm	over

0	30	53	70	90	115	150	200	250	320	0	30	53	70	90	115	150	200	250	320	0	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.5
---	----	----	----	----	-----	-----	-----	-----	-----	---	----	----	----	----	-----	-----	-----	-----	-----	---	-----	-----	-----	-----	-----	-----	-----	-----	-----

ITEM	NAME OF PART	NO. OF PART	Q'TY	WH	MATERIAL	NOTE
DWG	CHK	DATE	20.12.10	UNITS	MM	SHEET/OF 1/1
APP.	DATE	SCALE	1:1	A4		
NINGBO UL0 ELECTRONICS CO.,LTD.			UL0-TB01-15KN-B/381-2XXXP-Y000A			
宁波欧路电子有限公司			UL0TB01Y000A			