
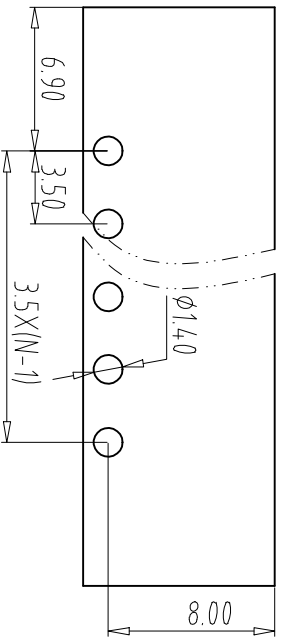
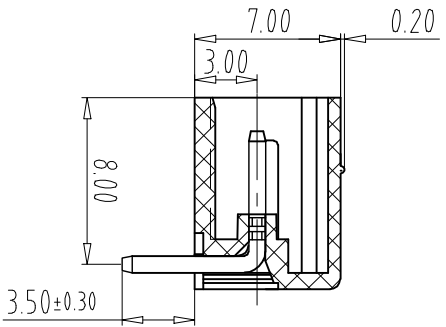
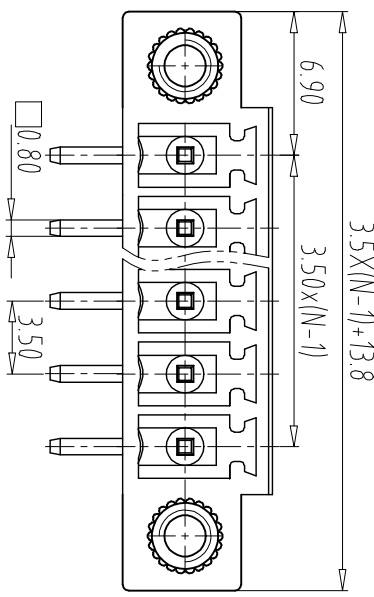


FILE: 2020-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

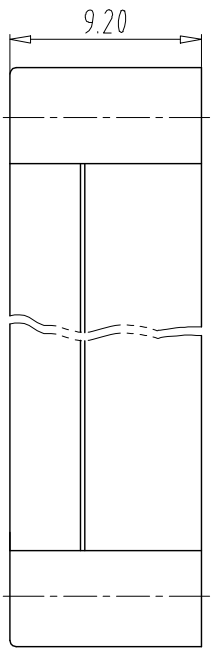

PCB Layout

NOTES1:
UL Standard
1. Use group B C D
Rated Current 8A - 8A
Rated Voltage 300V - 300V

IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	10.5A

NOTES2:
1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(Sn Plated)
3.Nut: Brass

NOTES3:
1.Pitch: 3.50mm Poles: 02~24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order
UL0-TB01 - 15RM/3.5 - XXP - Y 0 0 0A
Certificate Factory poles
Series NO. Code Customer requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances in mm												Nominal dimension range in mm												—		//	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150	150	150	150	150	
$\pm 0.18 \pm 0.20 \pm 0.25 \pm 0.3 \pm 0.35 \pm 0.44 \pm 0.55 \pm 0.70 \pm 0.75 \$																											

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.20	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB01-15RM/3.5-XXP-V000A		
				DWGNO.	UL0TB01Y000A

