

		2		1	
REV	E.C.N. NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

Use group	B	C	D
Rated Current	4A	—	—
Rated Voltage	150V	—	—

2. Wire range: 24 ~ 20AWG

IEC Standard



1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	160V
Rate Current(A)	6A

2.wire range: 0.2-0.5mm²

NOTES:

- 1.Pitch: 2.50mm Poles: 02-12P
2.Stripping length:5-6mm
3.Operating temperature: -40°C~+105°C
4.RoHS Compliance

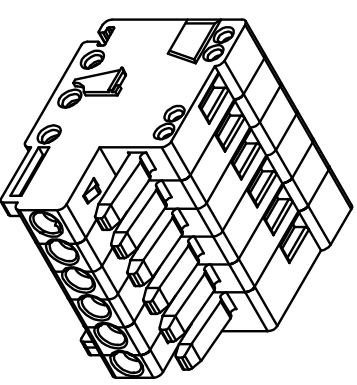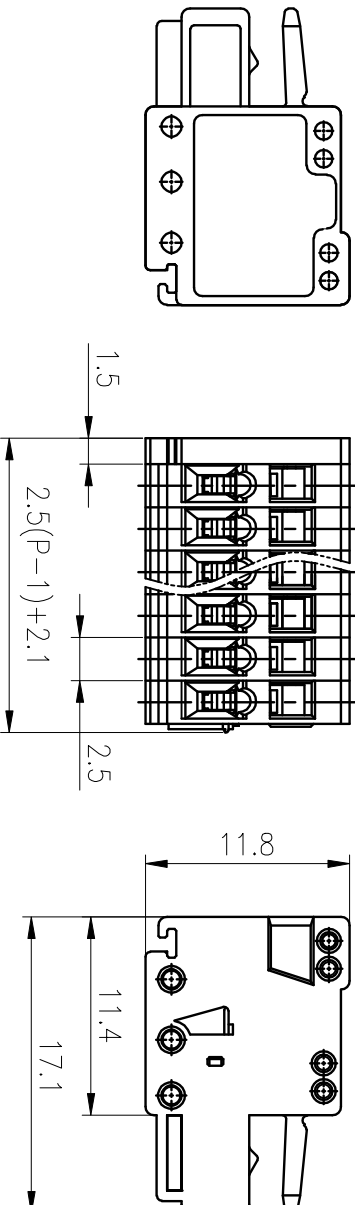

Total P ₁		Tolerances		Nominal dimension		range		—		=		//	
in mm		in mm		in mm		in mm							
over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90
to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44
±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.2	0.3	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL		NOTE	
DWG.	/	DATE		MM	SHEET/OF	1/1	
CHK.	DATE		SCALE	1:1	A4		
APP.	DATE						