

FILE: 2106.03

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	4A	-	-
	Rated Voltage	150V	-	-

2.Wire range: 24~20AWG

IEC Standard

1.	Pollution Degree	2
	Overvoltage Category	II
	Rate Impulse Voltage(KV)	2.5KV
	Rate Voltage(V)	160V
	Rate Current(A)	6A

2.wire range: 0.2-0.5mm²


NOTES2:

1.Pitch: 2.5mm Poles: 02-24P

2.Stripping length:5-6mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

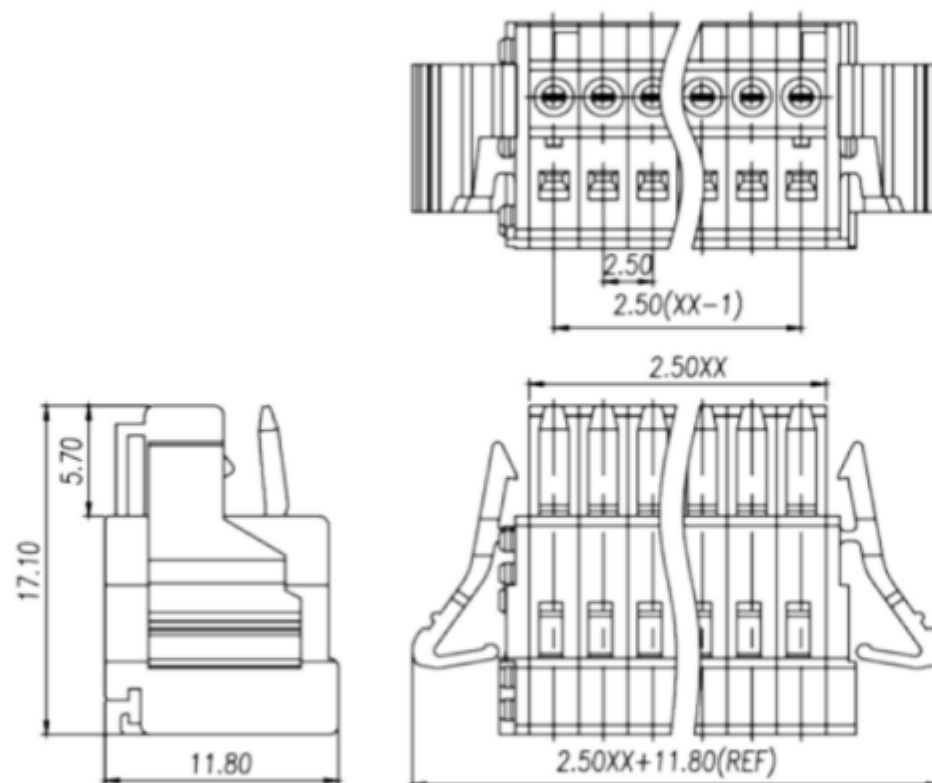

Total Pitch Tolerances in mm										Nominal dimension range in mm								$\perp$		$\equiv$	$-$ //				
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10	to 10	to 10	to all	to 100	to 150	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB410-8KG-2.5-XXP			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司								