


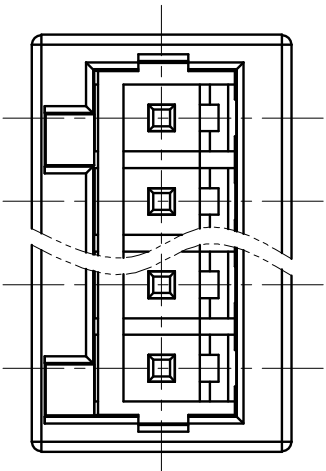

NOTES1:

UL Standard

1.

|               |      |   |   |
|---------------|------|---|---|
| Use group     | B    | C | D |
| Rated Current | 4A   | — | — |
| Rated Voltage | 150V | — | — |

2.Wire range: /

IEC Standard





1.

|                          |       |
|--------------------------|-------|
| Pollution Degree         | 2     |
| Overvoltage Category     | III   |
| Rate Impulse Voltage(KV) | 2.5KV |
| Rate Voltage(V)          | 150V  |
| Rate Current(A)          | 6A    |

2.wire range: /

NOTES2:

- 1.Pitch: 2.5mm   Poles: 02-12P
- 2.Stripping length: /
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

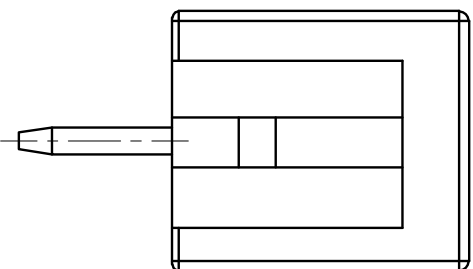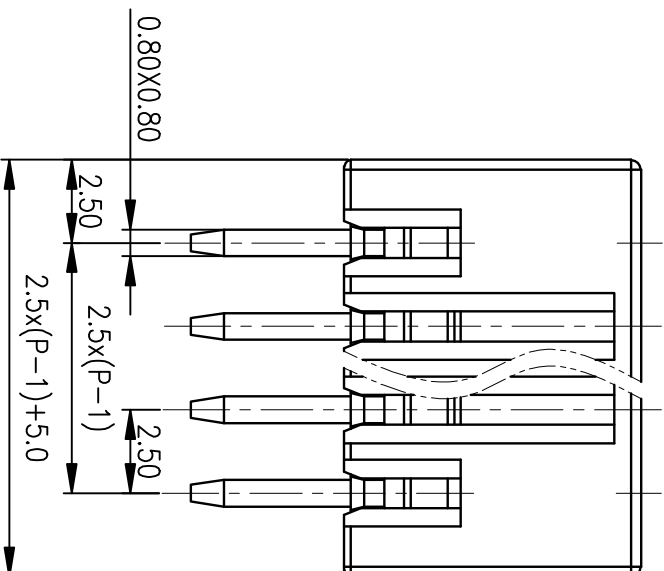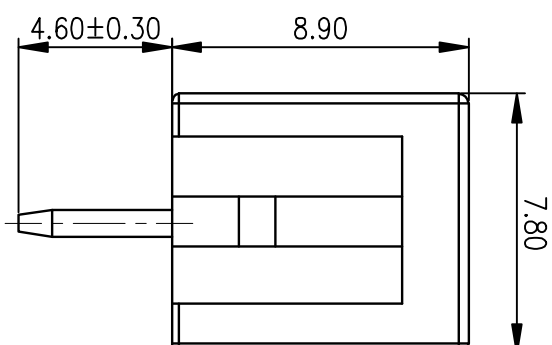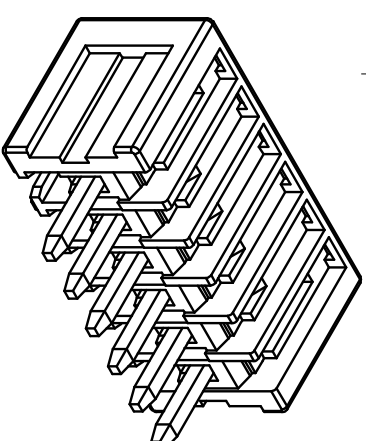

| A     | Total Pitch Tolerances |       |      |       |       |       |       |       |       |       | Nominal dimension range |       |       |       |       |       |       |     |     |      | —   | ≡   | —    | //  |     |      |     |     |
|-------|------------------------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------------------------|-------|-------|-------|-------|-------|-------|-----|-----|------|-----|-----|------|-----|-----|------|-----|-----|
|       | in mm                  |       |      |       |       |       |       |       |       |       | in mm                   |       |       |       |       |       |       |     |     |      |     |     |      |     |     |      |     |     |
| over  | 0                      | 30    | 53   | 70    | 90    | 115   | 150   | 200   | 250   | 0     | 30                      | 53    | 70    | 90    | 115   | 150   | 200   | 250 | 0   | over | 0   | 100 | over | 0   | 100 | over | 150 |     |
| to    | 30                     | 53    | 70   | 90    | 115   | 150   | 200   | 250   | 320   | 30    | 53                      | 70    | 90    | 115   | 150   | 200   | 250   | 320 | 10  | all  | to  | 100 | to   | 100 | to  | 150  | to  | 150 |
| ±0.18 | ±0.20                  | ±0.25 | ±0.3 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.75 | ±0.20 | ±0.25 | ±0.30                   | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.80 | ±0.90 | 0.2 | 0.3 | 0.3  | 0.2 | 0.3 | 0.3  | 0.2 | 0.3 | 0.5  | 0.5 |     |

| ITEM | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTE                   |
|------|--------------|-------------|------|----------|------------------------|
| DWG. | /            | /           |      |          |                        |
| CHK. | DATE         |             |      |          |                        |
| APP. | DATE         |             |      |          |                        |
|      |              |             |      | NAME     | UL0-1B4,10-8VC-2.5-XXP |
|      |              |             |      | DWGNO    | X                      |