

		2		1	
REV	ECN NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

Use group	B	C	D
Rated Current	4A	—	—
Rated Voltage	150V	—	—

2. Wire range: /

IEC Standard

→

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	160V
Rate Current(A)	6A

2.wire range:/




NOTES:

1.Pitch:2.50mm Poles: 02-12P

2.Stripping length: /

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

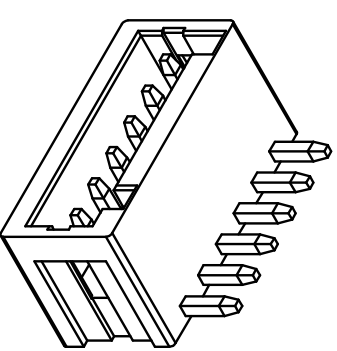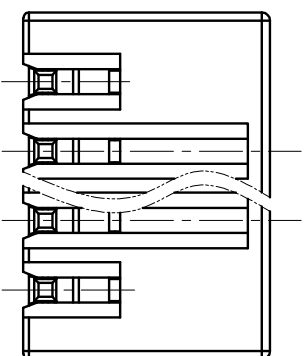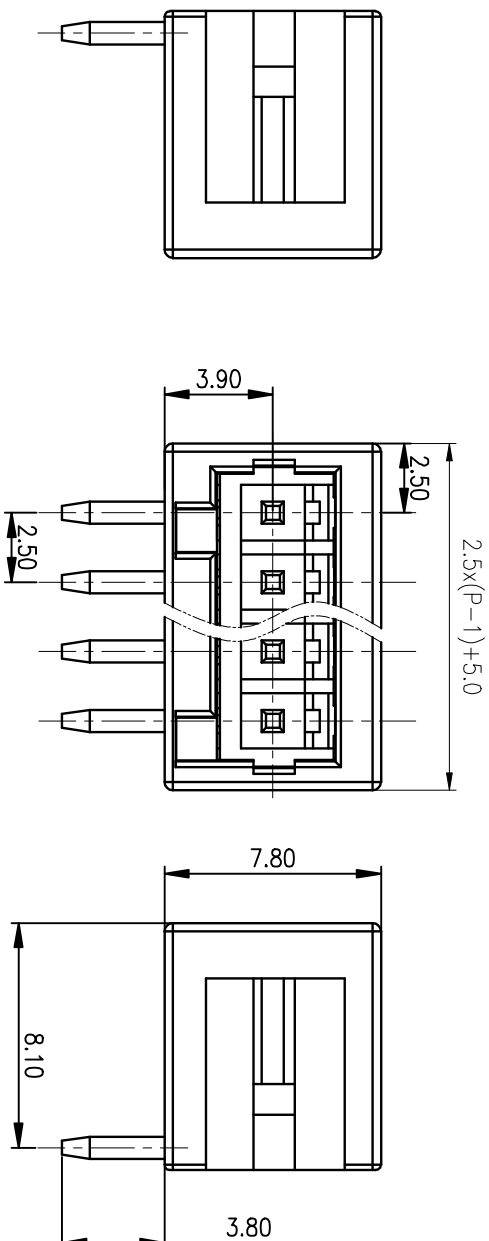

	Total PI in mm						Nominal dimension range in mm						$\frac{+}{-}$		$\frac{+}{-}$		$\frac{+}{-}$		$\frac{+}{-}$	
0 over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0 30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	100	over	over
To	To	To	To	To	To	To	To	To	To	To	To	To	To	To	To	To	To	To	To	To
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	100
-0.18±0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	/	DATE	/	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1 : 1	A4
APP.		DATE				
				NAME	UL0-TB410-8RC-2.5-XXP	
				DWGNO.	X	