

FILE: 210603		6	5	4	3	2	1
REV	EC.N NO.	CONTENT				CHK	DATE

NOTES1:

UL Standard

Use group	B	C	D
Rated Current	4A	—	—
Rated Voltage	150V	—	—

2.Wire range: 24~20AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	160V
Rate Current(A)	6A

2. wire range: 0.2-0.5mm²






NOTES2:

1.Pitch:2.5mm Poles: 02-12P

2.Stripping length:5-6mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

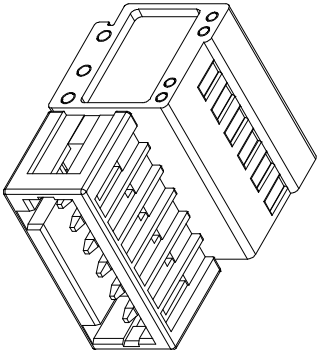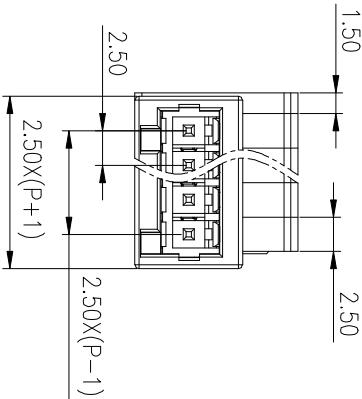

Total Pitch Tolerances in mm												Nominal dimension range in mm												—		—		//	
6												5												4					
over	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	0	over	0	over			
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to			
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	100	150								
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5						

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	/	DATE	/	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1 : 1	A4	
APP.	DATE		UL0-TB410-8KR-2.5-XXP			
NINGBO UL0 ELECTRONICS CO.,LTD.			NAME			
 宁波欧路电子有限公司			DWGNO.	X		
2			1			



宁波欧路电子有限公司