

NOTES1:
UL Standard
1.

Use group	B	C	D
Rated Current	10A	—	—
Rated Voltage	300V	—	—






2. Wire range: 24~16AWG
IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	10A

NOTES2:
2. wire range: 0.2-1.5mm²

1. Pitch: 3.5mm Poles: 02-24P
2. Stripping length: 7mm
3. Operating temperature: -40℃~+105℃
4. RoHS Compliance

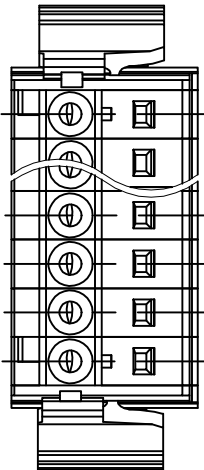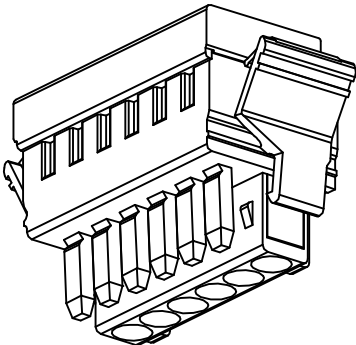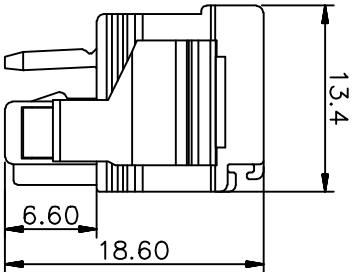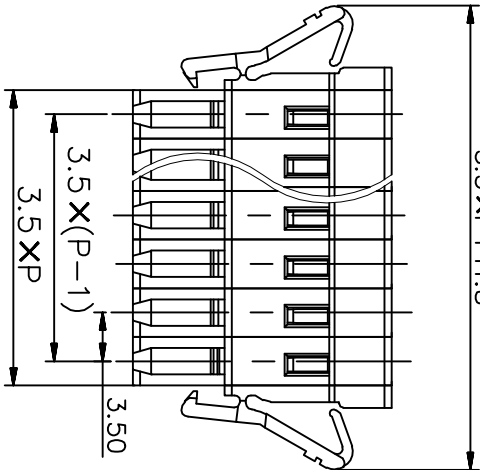

A	Total Pitch Tolerances										Nominal dimension range										—	≠	—	//			
	in mm										in mm																
over	0	30	53	70	90	115	150	200	250	0	over	0	30	53	70	90	115	150	200	250	0	over	0	over	0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10				all	100	150			
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.5			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	/		MM	SHEET/OF 1/1
CHK.	DATE			SCALE 1:1	A4
APP.	DATE			NAME	ULO-TB420-8KG-3.5-XXP
NINGBO ULO ELECTRONICS CO.,LTD.				DWGNO	X



宁波欧鹏电子有限公司