

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	10A	/	/
Rated Voltage	300V	/	/






2.Wire range: 24~16AWG
IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	10A

2.wire range: 0.2-1.5mm²

NOTES2:

- 1.Pitch:3.5mm Poles: 02-24P
- 2.Stripping length:7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

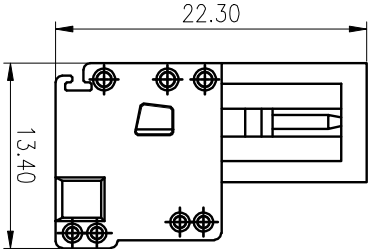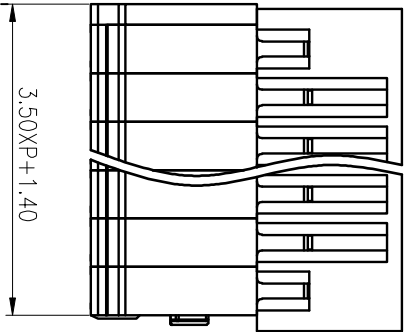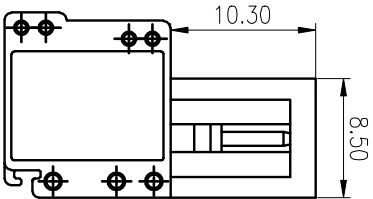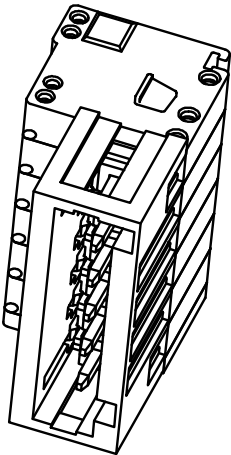

A		Total Pitch Tolerances in mm												Nominal dimension range in mm												T		≡		—		//	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	0	over	0	100	over	100	over	150	100	150	100	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to		
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	100	150	100	150	100	150	100	150	100	150	100	150		
±0.18±0.20±0.25±0.3±0.35±0.44±0.55±0.70±0.75±0.20±0.25±0.30±0.35±0.44±0.55±0.70±0.80±0.90																								0.2		0.3		0.3		0.5			
6												5												4		3		2		1			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	/			
CHK.	DATE				
APP.	DATE				
NINGBO UL O ELECTRONICS CO.,LTD.					NAME
宁波欧路电子有限公司					UO-TB420-8KR-3.5-XXP
DWGNO					X