

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	10A	—	—
Rated Voltage	300V	—	—




2.Wire range: /
IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	2.5kV
Rate Voltage(V)	250V
Rate Current(A)	10A

2.Wire range: /

NOTES2:

- 1.Pitch: 3.5mm Poles: 02-24P
- 2.Stripping length: /
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

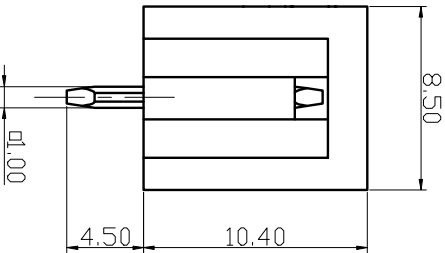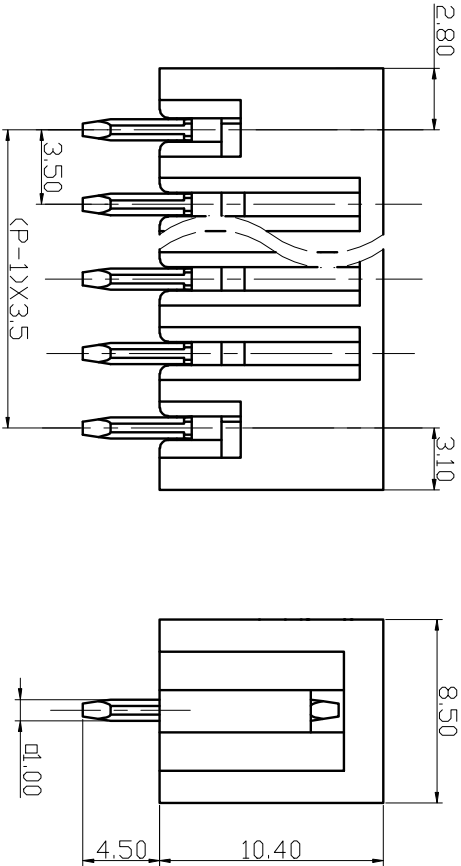

Total Pitch Tolerances												Nominal dimension range												⊥	≡	—	//
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	30	53	70	90	115	150	0	over	0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	150	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10				100	150				
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.5			
6												5												4			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	/			
CHK.	DATE				
APP.	DATE				
				NAME	UL0-TB420-8VC-3.5-XXP
				DWGNO.	X



NINGBO UIO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司