







FILE 2011-002\TL02		6		5		4		3		2		1	
REV		E.C.N NO.		CONTENT		CHK		DATE					
Go.		Go. 1		Go. 1		Go. 2		Go. 3		Go. 4		Go. 5	
刻槽位置													
产品代号/Part NO.		线径/Wire Diameter		ϕA		ϕB		标示图 (Go.)					
表面镀金/Gold-plated		mm ²		AWG									
UL0-CEGM-016-0.37		0.14-0.37		26-22		1.8		0.90		Go. 1			
UL0-CEGM-016-0.5		0.5		20		2.6		1.10		Go. 1			
UL0-CEGM-016-0.75		0.75		18		2.6		1.30		Go. 2			
UL0-CEGM-016-1.0		1.0		18		2.6		1.45		Go. 3			
UL0-CEGM-016-1.5		1.5		16		3.0		1.75		Go. 4			
UL0-CEGM-016-2.5		2.5		14		3.5		2.25		Go. 5			
UL0-CEGM-016-3.0		3.0		12		3.7		2.55		Go. 1			
UL0-CEGM-016-4.0		4.0		12		3.9		2.85		Go. 1			

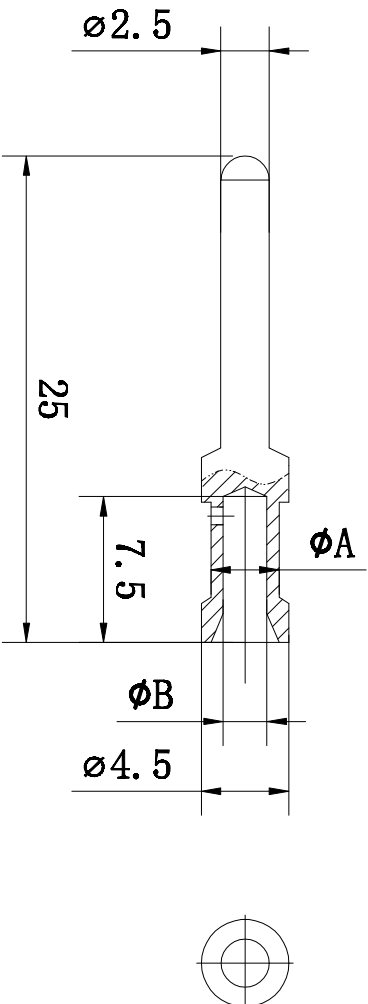

Technical specification:

1. Material: Copper alloy
2. Surface: hard-Gold plated
3. Rated Current: 16A
4. Contact resistance: $\leq 1m\Omega$
5. Wire gauge: 0.14-4.0mm² (26-12AWG)
6. Mechanical working life (mating cycles): ≥ 500



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.19	MM	SHEET/OF 1/1
CHK.	DATE	DATE		SCALE	1:1
APP.	DATE				
				NAME	UL0-CEGM-016-XX
				DWGNO.	