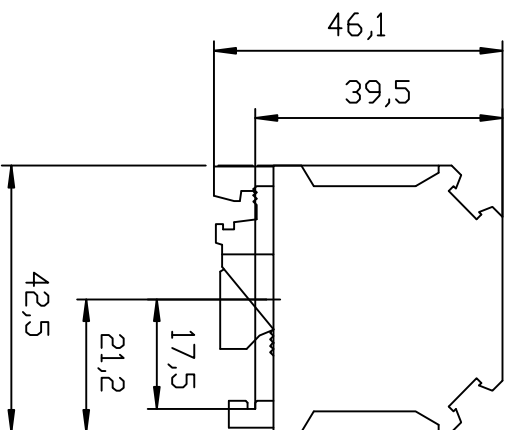



Technical data:

Product properties

1. Product type: Ground terminal block
2. Number of connections: 2
3. Number of rows: 1
4. Potentials: /

Electrical properties

1. Nominal voltage: /
2. Rated surge voltage: 6KV
3. Nominal current: /
4. Maximum load current: /
5. Nominal cross section: 16mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: /
9. Insulating material: PA
10. Flammability rating according to UL 94: V0

Connection data

1. Conductor cross section rigid: 2.5mm²-25mm²
2. Cross section AWG: 12-4
3. Conductor cross section flexible: 4mm²-16mm²
4. Conductor cross section, flexible AWG: 10-6
5. Stripping length: 11mm

[illegible]

ITEM	NAME OF PART		NO. OF PART	Q-TY	MATERIAL		NOTE	
DWG.	SWL	DATE	24.1.12	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE		UL0-TB140-UISLKG 16				
NAME								
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.	X			