

FILE: 2106.03									
REV		E.C.N NO.		CONTENT		CHK		DATE	

Technical data:

Product properties





- 1. Product type:Ground terminal block
- 2. Number of connections: 1
- 3. Number of rows: 2
- 4. Potentials: 1

Electrical properties

- 1. Nominal voltage: /
- 2. Rated surge voltage: 8kV
- 3. Nominal current: /
- 4. Maximum load current: /
- 5. Nominal cross section: 2. 5mm²
- 6. Overvoltage category: III
- 7. Degree of pollution: 3
- 8. Operating temperature range: -60℃~+110℃
- 9. Insulating material: PA
- 10. Flammability rating according to UL 94: V0

Connection data

- 1. Conductor cross section rigid: 0. 2mm²~4mm²
- 2. Cross section AWG: 24~12
- 3. Conductor cross section flexible: 0. 2mm²~2. 5mm²
- 4. Conductor cross section, flexible AWG: 24~14
- 5. Stripping length: 8mm

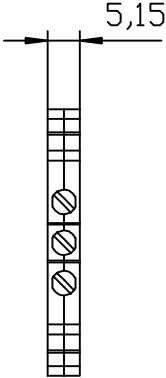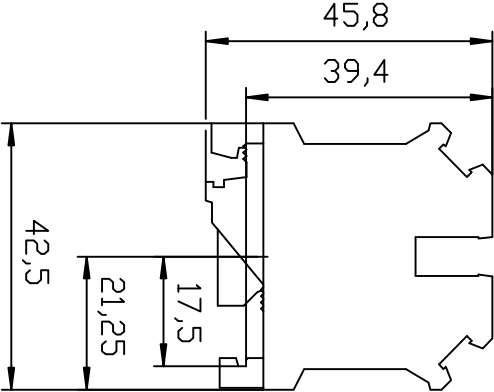

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320	30	53
±0.18 ±0.20 ±0.25 ±0.3 ±0.35 ±0.4 ±0.44 ±0.55 ±0.70 ±0.75 ±0.20 ±0.25 ±0.30 ±0.35 ±0.44 ±0.55 ±0.70 ±0.80 ±0.90		0.2		0.3		0.3		0.2	
6		5		4		3		2	
ITEM		NAME OF PART		NO. OF PART		Q'TY		MATERIAL	
DWG.		SWL		DATE		24.1.12		UNITS	
CHK.		DATE		SCALE		1 : 1		SHEET/OF	
APP.		DATE		NAME		UL0-TB140-USLKG 3N		A4	
NINGBO UL0 ELECTRONICS CO.,LTD.		NINGBO 宁波欧路电子有限公司		DWGNO.		X		1/1	
A		B		C		D		A	